



1

2

3

4

Document Identifier: DSP1036

Date: 2018-12-18

Version: 1.0.3

5

IP Interface Profile

6

Supersedes: 1.0.2

7

Document Class: Normative

8

Document Status: Published

9

Document Language: en-US

10 Copyright Notice

11 Copyright © 2008, 2009, 2010, 2018 DMTF. All rights reserved.

12 DMTF is a not-for-profit association of industry members dedicated to promoting enterprise and systems
13 management and interoperability. Members and non-members may reproduce DMTF specifications and
14 documents, provided that correct attribution is given. As DMTF specifications may be revised from time
15 to time, the particular version and release date should always be noted.

16 Implementation of certain elements of this standard or proposed standard may be subject to third party
17 patent rights, including provisional patent rights (herein "patent rights"). DMTF makes no representations
18 to users of the standard as to the existence of such rights, and is not responsible to recognize, disclose,
19 or identify any or all such third party patent right, owners or claimants, nor for any incomplete or
20 inaccurate identification or disclosure of such rights, owners or claimants. DMTF shall have no liability to
21 any party, in any manner or circumstance, under any legal theory whatsoever, for failure to recognize,
22 disclose, or identify any such third party patent rights, or for such party's reliance on the standard or
23 incorporation thereof in its product, protocols or testing procedures. DMTF shall have no liability to any
24 party implementing such standard, whether such implementation is foreseeable or not, nor to any patent
25 owner or claimant, and shall have no liability or responsibility for costs or losses incurred if a standard is
26 withdrawn or modified after publication, and shall be indemnified and held harmless by any party
27 implementing the standard from any and all claims of infringement by a patent owner for such
28 implementations.

29 For information about patents held by third-parties which have notified the DMTF that, in their opinion,
30 such patent may relate to or impact implementations of DMTF standards, visit
31 <http://www.dmtf.org/about/policies/disclosures.php>.

32 This document's normative language is English. Translation into other languages is permitted.

33

CONTENTS

35	Foreword	6
36	Introduction.....	7
37	1 Scope	9
38	2 Normative references.....	9
39	2.1 Approved references.....	9
40	3 Terms and definitions.....	10
41	4 Symbols and abbreviated terms.....	11
42	5 Synopsis	11
43	6 Description	12
44	6.1 Pending and alternate configuration management.....	13
45	7 Implementation.....	13
46	7.1 Basic IP configuration	13
47	7.2 DHCP client is supported.....	18
48	7.3 DNS client is supported	18
49	7.4 Managing alternate configurations — optional	18
50	7.5 Applying an alternate configuration	21
51	7.6 Relationship with a network interface	23
52	8 Methods.....	24
53	8.1 CIM_IPProtocolEndpoint.RequestStateChange()	24
54	8.2 CIM_IPConfigurationService.ApplySettingToIPProtocolEndpoint()	25
55	8.3 Profile conventions for operations	25
56	8.4 CIM_BindsToLANEndpoint.....	26
57	8.5 CIM_ElementSettingData	26
58	8.6 CIM_HostedAccessPoint.....	27
59	8.7 CIM_HostedService.....	28
60	8.8 CIM_IPAssignmentSettingData	28
61	8.9 CIM_IPConfigurationService	28
62	8.10 CIM_IPProtocolEndpoint	28
63	8.11 CIM_OrderedComponent	29
64	8.12 CIM_RemoteAccessAvailableToElement.....	29
65	8.13 CIM_RemoteServiceAccessPoint.....	29
66	8.14 CIM_ServiceAffectsElement	30
67	8.15 CIM_StaticIPAssignmentSettingData	30
68	8.16 CIM_SystemDevice	30
69	9 Use cases.....	31
70	9.1 Miscellaneous object diagrams.....	31
71	9.2 Determine supported configuration methods.....	44
72	9.3 Determine gateway address	44
73	9.4 Determine method used for current configuration	44
74	9.5 Determine whether DHCP then static is supported	45
75	9.6 View default configuration.....	45
76	9.7 Configure the interface to use DHCP	45
77	9.8 Establish a static IP configuration for an interface.....	46
78	9.9 Apply a pending configuration — synchronously.....	46
79	9.10 Apply a pending configuration — upon restart	46
80	9.11 Determine whether DNS configuration was DHCP assigned	47
81	9.12 Determine whether ElementName can be modified	47
82	9.13 Determine whether state management is supported.....	47
83	10 CIM Elements.....	47
84	10.1 CIM_BindsToLANEndpoint.....	48
85	10.2 CIM_ElementCapabilities	48
86	10.3 CIM_ElementSettingData — CIM_IPAssignmentSettingData reference	49

87	10.4	CIM_ElementSettingData — CIM_StaticIPAssignmentSettingData reference	49
88	10.5	CIM_EnabledLogicalElementCapabilities	50
89	10.6	CIM_HostedAccessPoint — CIM_RemoteServiceAccessPoint reference	50
90	10.7	CIM_HostedAccessPoint — CIM_IPProtocolEndpoint reference	50
91	10.8	CIM_HostedService	51
92	10.9	CIM_IPAssignmentSettingData	51
93	10.10	CIM_IPConfigurationService	51
94	10.11	CIM_IPProtocolEndpoint	52
95	10.12	CIM_OrderedComponent	52
96	10.13	CIM_RegisteredProfile	53
97	10.14	CIM_RemoteAccessAvailableToElement	53
98	10.15	CIM_RemoteServiceAccessPoint	53
99	10.16	CIM_ServiceAffectsElement	54
100	10.17	CIM_StaticIPAssignmentSettingData	54
101		ANNEX A (informative) Change log	55

102

103 Figures

104	Figure 1 – IP Interface Profile: Class diagram	12
105	Figure 2 – Registered Profile	31
106	Figure 3 – Basic configuration — IPv4	32
107	Figure 4 – Basic configuration — IPv6	33
108	Figure 5 – Basic configuration — IPv4 and IPv6	34
109	Figure 6 – Static current and pending configuration	35
110	Figure 7 – Static and DHCP pending configurations	36
111	Figure 8 – DHCP timed out to a static configuration	37
112	Figure 9 – Service processor and server share a NIC	38
113	Figure 10 – Configuration choices	39
114	Figure 11 – DHCP assigned partial DNS	40
115	Figure 12 – DHCP with DNS statically configured	41
116	Figure 13 – Static without DNS configuration — One	42
117	Figure 14 – Static without DNS configuration — Two	43
118	Figure 15 – Static without DNS configuration — Three	44
119		

120 Tables

121	Table 1 – Referenced Profiles	11
122	Table 2 – CIM_IPProtocolEndpoint.RequestStateChange() method: Return code values	24
123	Table 3 – CIM_IPProtocolEndpoint.RequestStateChange() method: Parameters	24
124	Table 4 – CIM_IPConfigurationService.ApplySettingToIPProtocolEndpoint() method:	
125	Return code values	25
126	Table 5 – CIM_IPConfigurationService.ApplySettingToIPProtocolEndpoint() method: Parameters	25
127	Table 6 – Operations: CIM_BindsToLANEndpoint	26
128	Table 7 – Operations: CIM_ElementSettingData	26
129	Table 8 – Operations: CIM_HostedAccessPoint	27
130	Table 9 – Operations: CIM_HostedService	28
131	Table 10 – Operations: CIM_IPProtocolEndpoint	28
132	Table 11 – Operations: CIM_OrderedComponent	29
133	Table 12 – Operations: CIM_RemoteAccessAvailableToElement	29

134 Table 13 – Operations: CIM_ServiceAffectsElement 30

135 Table 14 – Operations: CIM_StaticIPAssignmentSettingData..... 30

136 Table 15 – Operations: CIM_SystemDevice..... 30

137 Table 16 – CIM Elements: IP Interface Profile..... 47

138 Table 17 – Class: CIM_BindsToLANEndpoint..... 48

139 Table 18 – Class: CIM_ElementCapabilities..... 48

140 Table 19 – Class: CIM_ElementSettingData — CIM_IPAssignmentSettingData..... 49

141 Table 20 – Class: CIM_ElementSettingData — CIM_StaticIPAssignmentSettingData..... 49

142 Table 21 – Class: CIM_EnabledLogicalElementCapabilities..... 50

143 Table 22 – Class: CIM_HostedAccessPoint — CIM_RemoteServiceAccessPoint 50

144 Table 23 – Class: CIM_HostedAccessPoint — CIM_IPProtocolEndpoint..... 50

145 Table 24 – Class: CIM_HostedService 51

146 Table 25 – Class: CIM_IPAssignmentSettingData 51

147 Table 26 – Class: CIM_IPConfigurationService..... 51

148 Table 27 – Class: CIM_IPProtocolEndpoint..... 52

149 Table 28 – Class: CIM_OrderedComponent..... 52

150 Table 29 – Class: CIM_RegisteredProfile 53

151 Table 30 – Class: CIM_RemoteAccessAvailableToElement 53

152 Table 31 – Class: CIM_RemoteServiceAccessPoint..... 53

153 Table 32 – Class: CIM_ServiceAffectsElement 54

154 Table 33 – Class: CIM_StaticIPAssignmentSettingData 54

155

156

Foreword

157 The *IP Interface Profile* (DSP1036) was prepared by the Server Management Working Group and the
158 Physical Platform Profiles Working Group of the DMTF.

159 DMTF is a not-for-profit association of industry members dedicated to promoting enterprise and systems
160 management and interoperability.

161 Acknowledgments

162 The DMTF acknowledges the following individuals for their contributions to this document:

- 163 • RadhaKrishna Dasari – Dell Inc.
- 164 • Jon Hass – Dell Inc.
- 165 • Jeff Hilland – Hewlett Packard Enterprise
- 166 • John Leung – Intel Corporation
- 167 • Aaron Merkin – IBM
- 168 • Khachatur Papanyan – Dell Inc.
- 169 • Sivakumar Sathappan – Advanced Micro Devices
- 170 • Hemal Shah – Broadcom Inc.
- 171 • Christina Shaw – Hewlett Packard Enterprise
- 172 • Enoch Suen – Dell Inc.
- 173 • Perry Vincent – Intel Corporation

174

175

Introduction

176 The information in this specification should be sufficient for a provider or consumer of this data to identify
177 unambiguously the classes, properties, methods, and values that shall be instantiated and manipulated to
178 represent and manage an IP interface and its associated configuration information. The target audience
179 for this specification is implementers who are writing CIM-based providers or consumers of management
180 interfaces that represent the component described in this document.

181 Document conventions

182 Experimental material

183 Experimental material has yet to receive sufficient review to satisfy the adoption requirements set forth by
184 the DMTF. Experimental material is included in this document as an aid to implementers who are
185 interested in likely future developments. Experimental material may change as implementation
186 experience is gained. It is likely that experimental material will be included in an upcoming revision of the
187 document. Until that time, experimental material is purely informational.

188 The following typographical convention indicates experimental material:

189 **EXPERIMENTAL**

190 Experimental material appears here.

191 **EXPERIMENTAL**

192 In places where this typographical convention cannot be used (for example, tables or figures), the
193 "EXPERIMENTAL" label is used alone.

194

195

197

IP Interface Profile

198 1 Scope

199 The *IP Interface Profile* extends the management capability of referencing profiles by adding the
200 capability to represent an IP interface of a managed system. This profile includes a specification of the IP
201 interface, its associated IP configuration, optional support for managing pending configurations, optional
202 support for the relationship with a DNS client, and optional support for the relationship with a DHCP client.

203 2 Normative references

204 The following referenced documents are indispensable for the application of this document. For dated or
205 versioned references, only the edition cited (including any corrigenda or DMTF update versions) applies.
206 For references without a date or version, the latest published edition of the referenced document
207 (including any corrigenda or DMTF update versions) applies.

208 2.1 Approved references

209 DMTF DSP0004, *CIM Infrastructure Specification 2.6*,
210 https://www.dmtf.org/sites/default/files/standards/documents/DSP0004_2.6.pdf

211 DMTF DSP0200, *CIM Operations over HTTP 1.3*,
212 https://www.dmtf.org/sites/default/files/standards/documents/DSP0200_1.3.pdf

213 DMTF DSP1001, *Management Profile Specification Usage Guide 1.0*,
214 https://www.dmtf.org/sites/default/files/standards/documents/DSP1001_1.0.pdf

215 DMTF DSP1033, *Profile Registration Profile 1.0*,
216 https://www.dmtf.org/sites/default/files/standards/documents/DSP1033_1.0.pdf

217 DMTF DSP1035, *Host LAN Network Port Profile 1.0*,
218 http://www.dmtf.org/standards/published_documents/DSP1035_1.0.pdf

219 DMTF DSP1037, *DHCP Client Profile 1.0*,
220 http://www.dmtf.org/standards/published_documents/DSP1037_1.0.pdf

221 DMTF DSP1038, *DNS Client Profile 1.0*,
222 http://www.dmtf.org/standards/published_documents/DSP1038_1.0.pdf

223 IETF, RFC 1208, *A Glossary of Networking Terms*, March 1991, <http://www.ietf.org/rfc/rfc1208.txt>

224 IETF, RFC 2131, *Dynamic Host Configuration Protocol*, March 1997, <http://www.ietf.org/rfc/rfc2131.txt>

225 IETF, RFC 4291, *IP Version 6 Addressing Architecture*, February 2006, <http://www.ietf.org/rfc/rfc4291.txt>

226 ISO/IEC Directives, Part 2, *Rules for the structure and drafting of International Standards*,
227 <http://isotc.iso.org/livelink/livelink.exe?func=ll&objId=4230456&objAction=browse&sort=subtype>

228 3 Terms and definitions

229 For the purposes of this document, the terms and definitions in [DSP1033](#) and [DSP1001](#) as well as the
230 following definitions apply.

231 3.1

232 **can**

233 used for statements of possibility and capability, whether material, physical, or causal

234 3.2

235 **cannot**

236 used for statements of possibility and capability, whether material, physical, or causal

237 3.3

238 **conditional**

239 indicates requirements to be followed strictly to conform to the document when the specified conditions
240 are met

241 3.4

242 **mandatory**

243 indicates requirements to be followed strictly to conform to the document and from which no deviation is
244 permitted

245 3.5

246 **may**

247 indicates a course of action permissible within the limits of the document

248 3.6

249 **need not**

250 indicates a course of action permissible within the limits of the document

251 3.7

252 **optional**

253 indicates a course of action permissible within the limits of the document

254 3.8

255 **pending configuration**

256 the configuration that will be applied to an IP interface the next time the interface accepts a configuration

257 3.9

258 **referencing profile**

259 indicates a profile that owns the definition of this class and can include a reference to this profile in its
260 "Referenced Profiles" table

261 3.10

262 **shall**

263 indicates requirements to be followed strictly to conform to the document and from which no deviation is
264 permitted

265 3.11

266 **shall not**

267 indicates requirements to be followed strictly to conform to the document and from which no deviation is
268 permitted

- 269 **3.12**
- 270 **should**
- 271 indicates that among several possibilities, one is recommended as particularly suitable, without
- 272 mentioning or excluding others, or that a certain course of action is preferred but not necessarily required
- 273 **3.13**
- 274 **should not**
- 275 indicates that a certain possibility or course of action is deprecated but not prohibited
- 276 **3.14**
- 277 **unspecified**
- 278 indicates that this profile does not define any constraints for the referenced CIM element or operation

279 **4 Symbols and abbreviated terms**

280 The following abbreviations are used in this document.

- 281 **4.1**
- 282 **DHCP**
- 283 Dynamic Host Configuration Protocol
- 284 **4.2**
- 285 **DNS**
- 286 Domain Name System
- 287 **4.3**
- 288 **IP**
- 289 Internet Protocol

290 **5 Synopsis**

- 291 **Profile Name:** IP Interface
- 292 **Version:** 1.0.1
- 293 **Organization:** DMTF
- 294 **CIM Schema Version:** 2.19
- 295 **Central Class:** CIM_IPProtocolEndpoint
- 296 **Scoping Class:** CIM_ComputerSystem

297 The *IP Interface Profile* extends the management capability of referencing profiles by adding the
 298 capability to represent an IP interface of a managed system. This profile includes a specification of the IP
 299 interface, its associated IP configuration, optional support for managing pending configurations, optional
 300 support for the relationship with a DNS client, and optional support for the relationship with a DHCP client.

301 Table 1 identifies profiles on which this profile has a dependency.

302 **Table 1 – Referenced Profiles**

Profile Name	Organization	Version	Requirement	Description
Profile Registration	DMTF	1.0	Mandatory	None
DNS Client	DMTF	1.0	Optional	See 7.3.

317 • optional relationship with a DHCP client

318 • current and pending configurations

319 Functionality explicitly excluded from the scope of this profile includes:

320 • modeling of the network gateway

321 • modeling of TCP/UDP ports

322 Any representation of network elements is purely from the perspective of the IP interface. That is, no
323 provisions are made for the modeling of network resources for the purposes of managing those
324 resources.

325 This profile represents the current configuration of an IP interface, associated configurations that could be
326 applied, the DNS client, and the DHCP client. Support for the DNS and DHCP clients is not required. In
327 general, the various subclasses of CIM_ProtocolEndpoint reflect the current configuration and status of
328 their respective elements.

329 Functionality provided by other systems (Gateway, DHCP server, and DNS server) is modeled from the
330 IP interface view and is therefore represented by instances of CIM_RemoteServiceAccessPoint.

331 **6.1 Pending and alternate configuration management**

332 Pending configurations, which are associated with the IP interface and could be applied in the future, are
333 represented by instances of CIM_IPAssignmentSettingData and its subclasses. Each pending
334 configuration can include multiple settings that will be applied to the different elements of the endpoint
335 configuration. Settings for a particular element of the configuration are represented with the appropriate
336 subclass of CIM_IPAssignmentSettingData and aggregated into one or more instances of
337 CIM_IPAssignmentSettingData that represent the configuration.

338 The management of DNS and DHCP clients as part of an alternate configuration is handled differently for
339 the two clients. DHCP and static IP configuration management are generally treated as alternatives to
340 each other. For the basic configuration of an IP interface, the information is assigned either statically or
341 through DHCP. DNS configuration occurs differently. When DNS and static configuration occur together,
342 there is no overlap. Thus the DNS settings that are part of the configuration are applied to the DNS client.
343 When DHCP and DNS settings are used together, portions of the DNS configuration can potentially be
344 assigned through DHCP.

345 The intended usage model for alternate configurations is that an implementation presents a finite set of
346 alternate configurations. It is expected that an alternate configuration will be instrumented for each unique
347 ordering of static and DHCP assignment supported by the implementation. An alternate configuration can
348 also be provided for each unique configuration persisted (either in the instrumentation layer or underlying
349 modeled component). DNS configuration is presented as an optional aspect of each unique alternate
350 configuration with which DNS usage is supported.

351 **7 Implementation**

352 This clause details the requirements related to the arrangement of instances and properties of instances
353 for implementations of this profile.

354 **7.1 Basic IP configuration**

355 The basic configuration of the IP interface consists of the IP address, subnet mask, and default gateway.

356 **7.1.1 CIM_IPProtocolEndpoint**

357 An instance of CIM_IPProtocolEndpoint shall represent the IP interface. The properties of the instance of
358 CIM_IPProtocolEndpoint shall reflect the current configuration of an IP interface.

359 7.1.1.1 CIM_IPProtocolEndpoint.AddressOrigin

360 The AddressOrigin property indicates the configuration method that resulted in the configuration being
361 assigned to the CIM_IPProtocolEndpoint.

362 7.1.1.1.1 AddressOrigin — Static

363 A value of 3 (Static) shall indicate that the configuration was assigned statically. The AddressOrigin
364 property shall have a value of 3 (Static) when the configuration is the result of an instance of
365 CIM_StaticIPAssignmentSettingData being successfully applied. Clause 7.5.3.3 explains what it means
366 for settings to be successfully applied.

367 7.1.1.1.2 AddressOrigin — DHCP

368 A value of 4 (DHCP) shall indicate that the configuration was obtained through an associated DHCP
369 client. The AddressOrigin property shall have a value of 4 (DHCP) when the configuration is the result of
370 an instance of CIM_DHCPSettingData being successfully applied.

371 7.1.1.2 CIM_IPProtocolEndpoint.ProtocolIFType

372 The ProtocolIFType property shall indicate the current IP address type.

373 If the value is 4096 (IPv4) the IPv4Address and SubnetMask properties shall be implemented.

374 The value of CIM_IPProtocolEndpoint.ProtocolIFType shall be 4096,

375 EXPERIMENTAL

376 4097, or 4098.

377 If the value is 4097 (Ipv6) the IPv6Address, IPv6AddressType, and IPv6SubnetPrefixLength properties
378 shall be implemented.

379 If the value is 4098 (Ipv4/Ipv6) the IPv6Address, IPv6AddressType, and IPv6SubnetPrefixLength
380 properties shall be implemented and the IPv6AddressType shall be 7 (Embedded IPv4 Address).

381 EXPERIMENTAL

382 7.1.1.3 CIM_IPProtocolEndpoint.IPv4Address

383 If the value of CIM_IPProtocolEndpoint.ProtocolIFType is 4096 (IPv4), the IPv4Address property shall
384 indicate the current IPv4 address assigned to this IP endpoint. The value of the property shall be
385 specified in dotted decimal notation as defined in IETF [RFC 1208](#). A value of 0.0.0.0 shall indicate that a
386 valid IP address is not assigned to this IP endpoint.

387 7.1.1.4 CIM_IPProtocolEndpoint.SubnetMask

388 If the value of CIM_IPProtocolEndpoint.ProtocolIFType is 4096 (IPv4), the SubnetMask property shall be
389 specified using dotted decimal notation as defined in IETF [RFC 1208](#). A value of 0.0.0.0 shall indicate
390 that a valid subnet mask is not assigned to this IP endpoint.

391 EXPERIMENTAL**392 7.1.1.5 CIM_IPProtocolEndpoint.IPv6Address**

393 If the value of CIM_IPProtocolEndpoint.ProtocolIType is 4097 (IPv6) or 4098 (IPv4/IPv6), the
394 IPv6Address property shall indicate the current IPv6 address assigned to this IP endpoint. The value of
395 the property shall be specified in the notation specified in IETF [RFC 4291](#), section 2.2.

396 EXPERIMENTAL

397 7.1.2 IP interface state management is supported — conditional

398 When management of the state of an IP interface is supported, exactly one instance of
399 CIM_EnabledLogicalElementCapabilities shall be associated with the CIM_IPProtocolEndpoint instance
400 through an instance of CIM_ElementCapabilities. The existence of the CIM_ElementCapabilities instance
401 is conditional on the existence of the CIM_EnabledLogicalElementCapabilities instance.

402 Support for managing the state of the IP interface is optional behavior. This clause describes the CIM
403 elements and behaviors that shall be implemented when this behavior is supported.

404 7.1.2.1 CIM_EnabledLogicalElementCapabilities

405 The instance of CIM_EnabledLogicalElementCapabilities is used to advertise the state management
406 supported for the IP interface.

407 7.1.2.1.1 CIM_EnabledLogicalElementCapabilities.RequestedStatesSupported

408 The RequestedStatesSupported property may contain zero or more of the following values: 2 (Enabled),
409 3 (Disabled), or 11 (Reset).

410 7.1.2.2 CIM_IPProtocolEndpoint.RequestedState

411 When the CIM_IPProtocolEndpoint.RequestStateChange() method is successfully invoked, the value of
412 the RequestedState property shall be the value of the RequestedState parameter. If the method is not
413 successfully invoked, the value of the RequestedState property is indeterminate.

414 The CIM_IPProtocolEndpoint.RequestedState property shall have one of the values specified in the
415 CIM_EnabledLogicalElementCapabilities.RequestedStatesSupported property or a value of 5 (No
416 Change).

417 7.1.2.3 CIM_IPProtocolEndpoint.EnabledState

418 When the RequestedState parameter has a value of 2 (Enabled) or 3 (Disabled) and the
419 CIM_IPProtocolEndpoint.RequestStateChange() method completes successfully, the value of the
420 EnabledState property shall equal the value of the CIM_IPProtocolEndpoint.RequestedState property.

421 If the method does not complete successfully, the value of the EnabledState property is indeterminate.

422 The EnabledState property shall have one of the following values: 2 (Enabled), 3 (Disabled), or 6
423 (Enabled but Offline).

424 7.1.3 IP interface state management is not supported

425 This clause describes the CIM elements and behaviors that shall be implemented when management of
426 the IP Interface state is not supported.

427 7.1.3.1 CIM_EnabledLogicalElementCapabilities

428 When state management is not supported, exactly one instance of
429 CIM_EnabledLogicalElementCapabilities may be associated with the CIM_IPProtocolEndpoint instance
430 through an instance of CIM_ElementCapabilities.

431 7.1.3.1.1 CIM_EnabledLogicalElementCapabilities.RequestedStatesSupported

432 The CIM_EnabledLogicalElementCapabilities.RequestedStatesSupported property shall not contain any
433 values.

434 7.1.3.2 CIM_IPProtocolEndpoint.RequestedState

435 The RequestedState property shall have the value 12 (Not Applicable).

436 7.1.3.3 CIM_IPProtocolEndpoint.EnabledState

437 The EnabledState property shall have one of the following values: 2 (Enabled), 3 (Disabled), 5 (Not
438 Applicable), or 6 (Enabled but Offline).

439 7.1.4 Modifying ElementName is supported — conditional

440 The CIM_IPProtocolEndpoint.ElementName property may support being modified by the ModifyInstance
441 operation. See 8.10.1.1.

442 This behavior is conditional. This clause describes the CIM elements and behavior requirements when an
443 implementation supports client modification of the CIM_IPProtocolEndpoint.ElementName property.

444 7.1.4.1 CIM_EnabledLogicalElementCapabilities

445 An instance of CIM_EnabledLogicalElementCapabilities shall be associated with the
446 CIM_IPProtocolEndpoint instance through an instance of CIM_ElementCapabilities.

447 7.1.4.1.1 CIM_EnabledLogicalElementCapabilities.ElementNameEditSupported

448 The ElementNameEditSupported property shall have a value of TRUE.

449 7.1.4.1.2 CIM_EnabledLogicalElementCapabilities.MaxElementNameLen

450 The MaxElementNameLen property shall be implemented.

451 7.1.5 Modifying ElementName is not supported

452 This clause describes the CIM elements and behaviors that shall be implemented when the
453 CIM_IPProtocolEndpoint.ElementName property does not support being modified by the ModifyInstance
454 operation.

455 7.1.5.1 CIM_EnabledLogicalElementCapabilities

456 An instance of CIM_EnabledLogicalElementCapabilities may be associated with the
457 CIM_IPProtocolEndpoint instance through an instance of CIM_ElementCapabilities.

458 7.1.5.1.1 CIM_EnabledLogicalElementCapabilities.ElementNameEditSupported

459 The ElementNameEditSupported property shall have a value of FALSE.

460 7.1.5.1.2 CIM_EnabledLogicalElementCapabilities.MaxElementNameLen

461 The MaxElementNameLen property may be implemented. The MaxElementNameLen property is
462 irrelevant in this context.

463 7.1.6 Default gateway

464 An IP interface can be configured with the address of a network gateway. Modeling of the default gateway
465 is optional. When the IP interface is configured with the address of a default gateway, an instance of
466 CIM_RemoteServiceAccessPoint shall represent the default gateway. The instance of
467 CIM_RemoteServiceAccessPoint shall be associated with the instance of CIM_IPProtocolEndpoint
468 through an instance of CIM_RemoteAccessAvailableToElement. An instance of
469 CIM_RemoteServiceAccessPoint may represent the default gateway even when a valid default gateway
470 has not been configured for the IP interface. It can be more convenient for an implementation to always
471 instantiate the instance of CIM_RemoteServiceAccessPoint even if a default gateway has not been
472 assigned to the IP interface rather than conditionally provide the relevant instances. For IPv4, this will
473 result in a single instance of CIM_RemoteServiceAccessPoint associated with the instance of
474 CIM_IPProtocolEndpoint.

475 EXPERIMENTAL

476 For IPv6 or IPv4/IPv6 there may be one or more instances of CIM_RemoteServiceAccessPoint
477 associated with the instance of CIM_IPProtocolEndpoint, because there may be more than one default
478 gateway. In this case, the use of CIM_RemoteAccessAvailableToElement.OrderOfAccess can be used to
479 represent the list of default gateways in priority order.

480 EXPERIMENTAL

481 For IPv6 or IPv4/IPv6 there may be one or more instances of CIM_RemoteServiceAccessPoint
482 associated with the instance of CIM_IPProtocolEndpoint, since there may be more than one default
483 gateway. In this case, the use of CIM_RemoteAccessAvailableToElement.OrderOfAccess can be used to
484 represent the list of default gateways in priority order.

485 7.1.6.1 CIM_RemoteServiceAccessPoint.AccessInfo

486 If the associated value of CIM_IPProtocolEndpoint.ProtocolIFType = 4096 (IPv4), then the value of the
487 AccessInfo property shall be the IPv4 address of the default gateway. The value shall be specified in
488 dotted decimal notation as defined in IETF [RFC 1208](#). A value of 0.0.0.0 shall indicate that a default
489 gateway has not been assigned to the associated IP interface.

490 EXPERIMENTAL

491 If the associated value of CIM_IPProtocolEndpoint.ProtocolIFType = 4097 (IPv6), then the value of the
492 AccessInfo property shall be the IPv6 address of the default gateway. The value shall be specified in the
493 IPv6 notation as defined in IETF [RFC 4291](#). An unspecified address, which has the value of “::/128”, shall
494 indicate that a default gateway has not been assigned to the associated IP interface.

495 If the associated value of CIM_IPProtocolEndpoint.ProtocolIFType = 4098 (IPv4/IPv6), then the value of
496 the AccessInfo property shall be the IPv6 address of the default gateway. The value shall be specified in
497 the IPv6 notation as defined in IETF [RFC 4291](#). An Unspecified Address, which has the value of “::/128”,
498 shall indicate that a default gateway has not been assigned to the associated IP interface.

499 EXPERIMENTAL

500 7.1.6.2 CIM_RemoteAccessAvailableToElement.Antecedent

501 The value of the Antecedent reference shall be the instance of CIM_RemoteServiceAccessPoint.
502 Cardinality *.

503 7.1.6.3 CIM_RemoteAccessAvailableToElement.Dependent

504 The value of the Dependent reference shall be the instance of CIM_IPProtocolEndpoint. Cardinality *.

505 7.1.6.4 CIM_RemoteAccessAvailableToElement.OrderOfAccess

506 If the associated value of CIM_IPProtocolEndpoint.ProtocolIFType = 4096 (IPv4), then the
507 OrderOfAccess property shall have a value of 0 (Zero).

508 7.2 DHCP client is supported

509 When a DHCP client is supported for the IP interface, the [DHCP Client Profile](#) shall be supported. This
510 behavior is optional.

511 7.3 DNS client is supported

512 When a DNS client is supported for the IP interface, the [DNS Client Profile](#) shall be supported. This
513 behavior is optional.

514 7.4 Managing alternate configurations — optional

515 Implementations may support the management of alternate or pending configurations for an IP interface.
516 When an implementation supports the management of alternate configurations, the following behavior
517 shall be supported.

518 7.4.1 Configuration management is supported

519 The CIM_IPConfigurationService class provides management of alternate configurations and support for
520 configuring additional interfaces. When an implementation supports management of alternate
521 configurations, exactly one instance of CIM_IPConfigurationService shall be associated with the Central
522 Instance of the profile through an instance of CIM_ServiceAffectsElement. The existence of the
523 CIM_ServiceAffectsElement association is conditional on the existence of the
524 CIM_IPConfigurationService instance.

525 The CIM_IPConfigurationService instance shall be associated with a CIM_ComputerSystem instance
526 through an instance of CIM_HostedService. The existence of the CIM_HostedService association is
527 conditional on the existence of the CIM_IPConfigurationService instance.

528 7.4.2 Representing an alternate configuration using CIM_IPAssignmentSettingData

529 Each instance of CIM_IPAssignmentSettingData shall represent a possible configuration for an IP
530 interface. The detailed settings for the IP interface shall be contained in the instances of subclasses of
531 CIM_IPAssignmentSettingData, which are associated with the instance of CIM_IPAssignmentSettingData
532 through instances of CIM_OrderedComponent.

533 The existence of one or more instances of CIM_IPAssignmentSettingData is conditional on the existence
534 of the CIM_IPConfigurationService instance. The existence of one or more instances of
535 CIM_ElementSettingData is conditional on the existence of one or more instances of
536 CIM_IPAssignmentSettingData.

537 7.4.2.1 Associating an alternate configuration with an IP interface

538 The instance of CIM_IPAssignmentSettingData shall be associated with the instance of
539 CIM_IPProtocolEndpoint through an instance of CIM_ElementSettingData.

540 7.4.2.1.1 CIM_ElementSettingData.IsCurrent

541 When an instance of CIM_ElementSettingData associates an instance of CIM_IPAssignmentSettingData
542 with an instance of CIM_IPProtocolEndpoint, the CIM_ElementSettingData.IsCurrent property shall have
543 a value of 1 (Is Current) when the configuration represented by the referenced instance of
544 CIM_IPAssignmentSettingData is the last configuration applied to the IP interface represented by the
545 referenced instance of CIM_IPProtocolEndpoint.

546 When an instance of CIM_ElementSettingData associates an instance of CIM_IPAssignmentSettingData
547 with an instance of CIM_IPProtocolEndpoint, the CIM_ElementSettingData.IsCurrent property shall have
548 a value of 2 (Is Not Current) when the configuration represented by the referenced instance of
549 CIM_IPAssignmentSettingData is not the last configuration applied to the IP interface represented by the
550 referenced instance of CIM_IPProtocolEndpoint.

551 **7.4.3 Associating settings using CIM_OrderedComponent**

552 Instances of the subclasses of CIM_IPAssignmentSettingData contain the details of the IP configuration.
553 The CIM_OrderedComponent association aggregates these instances into instances of
554 CIM_IPAssignmentSettingData. An instance of CIM_IPAssignmentSettingData will have one or more
555 instances of its subclasses associated with it through an instance of CIM_OrderedComponent. An
556 instance of a subclass of CIM_IPAssignmentSettingData will be associated with one or more instances of
557 CIM_IPAssignmentSettingData.

558 **7.4.3.1 CIM_OrderedComponent.GroupComponent**

559 An instance of CIM_IPAssignmentSettingData shall be the value of the GroupComponent property of an
560 instance of CIM_OrderedComponent. Cardinality 1..*

561 **7.4.3.2 CIM_OrderedComponent.PartComponent**

562 An instance of a subclass of CIM_IPAssignmentSettingData shall be the value of the PartComponent
563 property of an instance of CIM_OrderedComponent. Cardinality *

564 **7.4.3.3 Interpretation of CIM_OrderedComponent.AssignedSequence**

565 The relative value of the CIM_OrderedComponent.AssignedSequence property shall indicate the order in
566 which aggregated instances of subclasses of CIM_IPAssignmentSettingData are applied to their
567 associated CIM_ProtocolEndpoint instances.

568 **7.4.3.3.1 Use of 0 (zero)**

569 When the CIM_OrderedComponent.AssignedSequence property has a value of 0 (zero), the instance of
570 CIM_SettingData referenced by the CIM_OrderedComponent.PartComponent property shall not be
571 applied when the configuration represented by the CIM_IPAssignmentSettingData instance that is the
572 value of the CIM_OrderedComponent.GroupComponent property is applied. The
573 CIM_OrderedComponent.AssignedSequence property may have the value 0 (zero) when the instance of
574 CIM_OrderedComponent references an instance of CIM_DNSSettingData or
575 CIM_DNSGeneralSettingData. The CIM_OrderedComponent.AssignedSequence property shall not have
576 the value 0 (zero) when the instance of CIM_OrderedComponent does not reference an instance of
577 CIM_DNSSettingData or CIM_DNSGeneralSettingData.

578 **7.4.3.3.2 Discreteness**

579 Two instances of CIM_OrderedComponent that reference the same instance of
580 CIM_IPAssignmentSettingData shall not have the same value for their AssignedSequence properties
581 unless the value is 0 (zero).

582 **7.4.4 Alternate static configuration**

583 When an implementation supports the manual assignment of an IP configuration to the IP endpoint, an
584 instance of CIM_StaticIPAssignmentSettingData shall be associated with the CIM_IPProtocolEndpoint
585 through an instance of CIM_ElementSettingData.

586 CIM_ElementSettingData is conditional on the existence of one or more instances of
587 CIM_StaticIPAssignmentSettingData

588 This instance of CIM_StaticIPAssignmentSettingData shall be associated with at least one instance of
589 CIM_IPAssignmentSettingData through an instance of CIM_OrderedComponent. When the aggregating
590 IP configuration has been applied to the IP interface and the IP interface is using the settings contained in
591 the instance of CIM_StaticIPAssignmentSettingData, the IsCurrent property of the
592 CIM_ElementSettingData instance has the value 1 (Is Current). Otherwise, the
593 CIM_ElementSettingData.IsCurrent property shall have the value 2 (Is Not Current).

594 **7.4.5 Alternate DHCP configuration**

595 When an alternate configuration includes the configuration of the DHCP client, the implementation will
596 follow the rules for representing a pending DHCP configuration defined in the [DHCP Client Profile](#).

597 **7.4.6 DNS client alternate configuration**

598 When an alternate configuration includes the configuration of the DNS client, the implementation will
599 follow the rules for representing a pending DNS configuration defined in the [DNS Client Profile](#).

600 **7.4.7 Relationship between DHCP and DNS configuration**

601 Some settings of the DNS configuration might be provided by the DHCP server.

602 An instance of CIM_IPAssignmentSettingData can have associated with it an instance of
603 CIM_DHCPSettingData and an instance of CIM_DNSSettingData. It is necessary to be able to
604 differentiate between a configuration in which the manual DNS settings take precedence and one in
605 which the DHCP assigned values take precedence. The DNS configuration is assigned according to the
606 principle of last applied. That is, within a given configuration, the last value applied for a property takes
607 precedence.

608 **7.4.7.1 Relationship between DHCP options and the DNS configuration**

609 This clause details the requirements for the relationship between DHCP options and CIM elements that
610 model the DNS configuration. For the requirements expressed in this clause, the following definitions
611 apply:

612 DHCPPE – the instance of CIM_DHCPProtocolEndpoint that represents the DHCP client for an IP
613 interface

614 DNSPE – the instance of CIM_DNSProtocolEndpoint that represents the DNS client that is associated
615 through an instance of CIM_SAPSAPDependency with the same instance of CIM_IPProtocolEndpoint
616 with which the DHCPPE is associated through an instance of CIM_SAPSAPDependency

617 DNS Pending – the instance of CIM_DNSSettingData that is associated through an instance of
618 CIM_OrderedComponent with the instance of CIM_IPAssignmentSettingData that is being applied to the
619 CIM_IPProtocolEndpoint instance

620 DHCP Pending – the instance of CIM_DHCPSettingData that is associated through an instance of
621 CIM_OrderedComponent with the instance of CIM_IPAssignmentSettingData that is being applied to the
622 CIM_IPProtocolEndpoint instance

623 The following requirements shall be met when the [DHCP Client Profile](#) and the [DNS Client Profile](#) are
624 implemented:

- 625 • When the OptionsReceived property of the DHCPPE instance and the DHCPOptionsToUse
626 property of the DNSPE instance both contain the value 8 (Domain Name Server), the DNS
627 Servers instrumented in accordance with the "DNS Server Representation" clause of the [DNS](#)
628 [Client Profile](#) shall identify the DNS server addresses specified by the DHCP server as the data
629 for the Domain Name Server DHCP option.
- 630 • When the OptionsReceived property of the DHCPPE instance and the DHCPOptionsToUse
631 property of the DNSPE instance both contain the value 14 (Host Name), the value of the
632 Hostname property of the DNSPE instance shall be the hostname specified by the DHCP server
633 as the data for the Host Name DHCP option.
- 634 • When the OptionsReceived property of the DHCPPE instance and the DHCPOptionsToUse
635 property of the DNSPE instance both contain the value 17 (Domain Name), the value of the
636 DomainName property of the DNSPE instance shall be the domain name specified by the DHCP
637 server as the data for the Domain Name DHCP option.

638 When the RequestedHostname property of the DNS Pending instance has a non-null value and the
639 RequestedOptions or RequiredOptions property of the DHCP Pending instance contains the value 14
640 (Host Name), the DHCP client shall use the value of the RequestedHostname property as the data for the
641 Host Name DHCP option.

642 **7.4.8 Representing a pending configuration**

643 When an implementation supports alternate configurations, exactly one instance of
644 CIM_IPAssignmentSettingData shall be associated with the Central Instance through an instance of
645 CIM_ElementSettingData whose IsNext property has the value 1 (Is Next) .

646 Exactly one instance of CIM_IPAssignmentSettingData may be associated with the Central Instance
647 through an instance of CIM_ElementSettingData whose IsNext property has the value 3 (Is Next For
648 Single Use).

649 If an instance of CIM_IPAssignmentSettingData is associated with the Central Instance through an
650 instance of CIM_ElementSettingData whose IsNext property has the value 3 (Is Next For Single Use), this
651 instance of CIM_IPAssignmentSettingData shall represent the pending configuration. If no instance of
652 CIM_IPAssignmentSettingData is associated with the Central Instance through an instance of
653 CIM_ElementSettingData whose IsNext property has the value 3 (Is Next For Single Use), the instance of
654 CIM_IPAssignmentSettingData that is associated with the Central Instance through an instance of
655 CIM_ElementSettingData whose IsNext property has the value 1 (Is Next) shall represent the pending
656 configuration.

657 **7.5 Applying an alternate configuration**

658 Two methods exist for applying an alternate configuration to an IP interface. The first method allows a
659 client to explicitly select an alternate configuration to apply to an IP interface. A client can use the
660 CIM_IPConfigurationService.ApplySettingToIPProtocolEndpoint() method described in 8.1.1.1 to apply a
661 specific alternate configuration to the IP interface. The second method implicitly applies the pending
662 configuration to the IP interface when the IP interface transitions through a state transition or into a state
663 such that it will accept the pending configuration.

664 **7.5.1 Applying the pending configuration upon transition to enabled**

665 When the value of the EnabledState property of the CIM_IPProtocolEndpoint instance has a value other
666 than 2 (Enabled) and the value of the EnabledState property transitions to 2 (Enabled), the
667 implementation shall apply the pending configuration.

668 7.5.2 Determining the target CIM_ProtocolEndpoint Instance

669 An instance of CIM_IPAssignmentSettingData or its subclasses may be associated with more than one
670 instance of a subclass of CIM_ProtocolEndpoint through instances of CIM_ElementSettingData.
671 Instances of subclasses of CIM_IPAssignmentSettingData may be aggregated into one or more instances
672 of CIM_IPAssignmentSettingData where the aggregating CIM_IPAssignmentSettingData instances are
673 associated with different instances of CIM_IPProtocolEndpoint. This is allowed as a convenience for
674 instrumentation to reduce the number of instances required when multiple IP interfaces share a common
675 configuration.

676 The following rules unambiguously identify the instance of a subclass of CIM_ProtocolEndpoint that will
677 have an instance of a subclass of CIM_SettingData applied to it when a pending configuration is applied
678 to an instance of CIM_IPProtocolEndpoint. Note that the DNS and DHCP related classes are owned by
679 the [DNS Client Profile](#) and [DHCP Client Profile](#), respectively. The algorithm for determining their use is
680 provided here because it is part of the behavior of applying a configuration.

681 When a pending IP configuration is applied, each instance of CIM_StaticIPAssignmentSettingData that is
682 associated with the CIM_IPAssignmentSettingData instance through an instance of
683 CIM_OrderedComponent shall be applied to the CIM_IPProtocolEndpoint instance that is identified as
684 follows:

- 685 1) The CIM_IPProtocolEndpoint instance shall be associated with the
686 CIM_StaticIPAssignmentSettingData instance through an instance of CIM_ElementSettingData.
- 687 2) The CIM_IPProtocolEndpoint instance shall be the CIM_IPProtocolEndpoint instance to which
688 the aggregating CIM_IPAssignmentSettingData is being applied.

689 When a pending IP configuration is applied, each instance of CIM_DHCPSettingData that is associated
690 with the CIM_IPAssignmentSettingData instance through an instance of CIM_OrderedComponent shall
691 be applied to the CIM_DHCPProtocolEndpoint instance that is identified as follows:

- 692 1) The CIM_DHCPProtocolEndpoint instance shall be associated with the CIM_DHCPSettingData
693 instance through an instance of CIM_ElementSettingData.
- 694 2) The CIM_DHCPProtocolEndpoint instance shall be associated through an instance of
695 CIM_SAPSAPDependency with the CIM_IPProtocolEndpoint instance to which the aggregating
696 CIM_IPAssignmentSettingData is being applied.

697 When a pending IP configuration is applied, each instance of CIM_DNSSettingData that is associated
698 with the CIM_IPAssignmentSettingData instance through an instance of CIM_OrderedComponent shall
699 be applied to the CIM_DNSProtocolEndpoint instance that is identified as follows:

- 700 1) The CIM_DNSProtocolEndpoint instance shall be associated with the CIM_DNSSettingData
701 instance through an instance of CIM_ElementSettingData.
- 702 2) The CIM_DNSProtocolEndpoint instance shall be associated through an instance of
703 CIM_SAPSAPDependency with the CIM_IPProtocolEndpoint instance to which the aggregating
704 CIM_IPAssignmentSettingData is being applied.

705 7.5.3 Applying static IP settings

706 When an instance of CIM_StaticIPAssignmentSettingData is applied to the CIM_IPProtocolEndpoint
707 instance, the values of the properties of the CIM_IPProtocolEndpoint instance shall be the values of the
708 properties of the CIM_StaticIPAssignmentSettingData instance.

709 7.5.3.1 CIM_StaticIPAssignmentSettingData.GatewayIPv4Address

710 If the associated value of CIM_IPProtocolEndpoint.ProtocolIFTtype = 4096 (IPv4), then the value of the
711 AccessInfo property of the CIM_RemoteServiceAccessPoint that represents the default gateway shall be
712 the value of the CIM_StaticIPAssignmentSettingData.GatewayIPv4Address property.

713 EXPERIMENTAL

714 If the associated value of CIM_IPProtocolEndpoint.ProtocolIFType = 4098 (IPv4/IPv6), then the value of
715 the AccessInfo property of the CIM_RemoteServiceAccessPoint that represents the default IPv4 gateway
716 shall be the value of the CIM_StaticIPAssignmentSettingData.GatewayIPv4Address property.

717 7.5.3.2 CIM_StaticIPAssignmentSettingData.GatewayIPv6Address

718 If the associated value of CIM_IPProtocolEndpoint.ProtocolIFType = 4097 (IPv6), then the value of the
719 AccessInfo property of the CIM_RemoteServiceAccessPoint that represents the default IPv6 gateway
720 shall be the value of the CIM_StaticIPAssignmentSettingData.GatewayIPv6Address property.

721 EXPERIMENTAL

722 7.5.3.3 Successful application of settings

723 An instance of CIM_StaticIPAssignmentSettingData shall be considered successfully applied when the
724 properties of the associated instance of CIM_IPProtocolEndpoint to which the instance of
725 CIM_StaticIPAssignmentSettingData has been applied have the values of the relevant properties of the
726 CIM_StaticIPAssignmentSettingData instance.

727 7.5.4 Applying DHCP settings

728 When a pending configuration includes the configuration of the DHCP client, the DHCP configuration is
729 applied as defined in the [DHCP Client Profile](#).

730 7.5.5 Applying DNS settings

731 When a pending configuration includes DNS client configuration, the DNS configuration is applied as
732 defined in the [DNS Client Profile](#). When the AssignedSequence property of the CIM_OrderedComponent
733 association that references an instance of CIM_DNSSettingData or CIM_DNSGeneralSettingData has a
734 non-zero value, the referenced instance of CIM_DNSSettingData or CIM_DNSGeneralSettingData shall
735 be applied, regardless of whether the application of a preceding CIM_SettingData instance was
736 successful.

737 7.5.6 Resolving overlapped settings

738 When more than one instance of CIM_StaticIPAssignmentSettingData or CIM_DHCPSettingData is
739 associated with the same instance of CIM_IPAssignmentSettingData, each CIM_SettingData instance
740 shall be applied in order (as described in 7.4.3.3) until the implementation determines that the resultant
741 configuration is valid. The amount of time an implementation waits after applying an instance of
742 CIM_SettingData before deciding whether the resultant configuration is valid is implementation specific
743 and outside the scope of this specification. The criterion for determining whether a configuration that is
744 represented by a specific CIM_SettingData instance is valid is implementation specific and outside the
745 scope of this specification.

746 7.6 Relationship with a network interface

747 An IP interface is generally bound to an underlying network interface. The underlying network interface
748 might participate in a LAN and be modeled using the [Host LAN Network Port Profile](#) or a specialization
749 thereof. When the underlying network interface is modeled with instrumentation compliant with the [Host
750 LAN Network Port Profile](#), an instance of CIM_BindsToLANEndpoint shall associate the Central Instance
751 of this profile with an instance of CIM_LANEndpoint that is compliant with the [Host LAN Network Port
752 Profile](#).

753 **8 Methods**

754 This clause details the requirements for supporting intrinsic operations and extrinsic methods for the CIM
755 elements defined by this profile.

756 **8.1 CIM_IPProtocolEndpoint.RequestStateChange()**

757 Invocation of the RequestStateChange() method changes the element's state to the value specified in the
758 RequestedState parameter. The 2 (Enabled) and 3 (Disabled) values of the RequestedState parameter
759 shall correspond to enabling or disabling the IP network interface, respectively. A value of 11 (Reset)
760 shall correspond to disabling and then enabling the IP interface.

761 Detailed requirements of the RequestStateChange() method are specified in Table 2 and Table 3.

762 No standard messages are defined.

763 Invoking the RequestStateChange() method multiple times could result in earlier requests being
764 overwritten or lost.

765 **Table 2 – CIM_IPProtocolEndpoint.RequestStateChange() method: Return code values**

Value	Description
0	Request was successfully executed.
1	Method is unsupported.
2	Error occurred
4096	Job started: REF returned to started CIM_ConcreteJob

766 **Table 3 – CIM_IPProtocolEndpoint.RequestStateChange() method: Parameters**

Qualifiers	Name	Type	Description/Values
IN, REQ	RequestedState	uint16	Valid state values: 2 (Enabled) 3 (Disabled) 11 (Reset)
OUT	Job	CIM_ConcreteJob REF	Returned if job started
IN, REQ	TimeoutPeriod	datetime	Client specified maximum amount of time the transition to a new state is supposed to take: 0 or NULL – No time requirements <interval> – Maximum time allowed

767 **8.1.1.1 CIM_IPProtocolEndpoint.RequestStateChange() — Conditional support**

768 When an instance of CIM_EnabledLogicalElementCapabilities is associated with the
769 CIM_IPProtocolEndpoint instance and the
770 CIM_EnabledLogicalElementCapabilities.RequestedStatesSupported property contains at least one
771 value, the CIM_IPProtocolEndpoint.RequestStateChange() method shall be implemented and supported.
772 The CIM_IPProtocolEndpoint.RequestStateChange() method shall not return a value of 1 (Not
773 Supported).

774 **8.2 CIM_IPConfigurationService.ApplySettingToIPProtocolEndpoint()**

775 The CIM_IPConfigurationService.ApplySettingToIPProtocolEndpoint() method is used to apply a
 776 configuration, as represented by an aggregating instance of CIM_IPAssignmentSettingData, to an IP
 777 interface, as represented by an instance of CIM_IPProtocolEndpoint. Implementation of this method is
 778 optional.

779 Detailed requirements of the ApplySettingToIPProtocolEndpoint() method are specified in Table 4 and
 780 Table 5.

781 No standard messages are defined.

782 **Table 4 – CIM_IPConfigurationService.ApplySettingToIPProtocolEndpoint() method: Return code**
 783 **values**

Value	Description
0	Request was successfully executed.
1	Unsupported
2	Unknown/unspecified error
4	Failed
0x1000	Input parameters have been validated and a job started to apply the configuration.

784 **Table 5 – CIM_IPConfigurationService.ApplySettingToIPProtocolEndpoint() method: Parameters**

Qualifiers	Name	Type	Description/Values
IN, REQ	Configuration	CIM_IPAssignmentSettingData REF	The settings to apply
IN, REQ	Endpoint	CIM_IPProtocolEndpoint REF	CIM_IPProtocolEndpoint to configure
OUT	Job	CIM_ConcreteJob REF	Returned if job started

785 The CIM_IPConfigurationService.ApplySettingToIPProtocolEndpoint() method shall be implemented as
 786 follows:

- 787 • The implementation shall validate that an instance of CIM_ServiceAffectsElement references
 788 the CIM_IPConfigurationService instance and the CIM_IPProtocolEndpoint instance that is
 789 identified by the Endpoint parameter to the method. If the association does not exist, the return
 790 code of the method shall be 4 (Failed).
- 791 • The implementation shall validate that an instance of CIM_ElementSettingData associates the
 792 instance of CIM_IPProtocolEndpoint that is identified by the Endpoint parameter with the
 793 instance of CIM_IPAssignmentSettingData that is identified by the Configuration parameter. If
 794 the association does not exist, the return code of the method shall be 4 (Failed).

795 When the parameters have been validated and the method is applying the settings, the method shall
 796 apply the settings as documented in 7.5 and its subclauses.

797 **8.3 Profile conventions for operations**

798 For each profile class (including associations), the implementation requirements for operations, including
 799 those in the following default list, are specified in class-specific subclauses of this clause.

800 The default list of operations is as follows:

- 801 • GetInstance
- 802 • EnumerateInstances
- 803 • EnumerateInstanceNames
- 804 • Associators
- 805 • AssociatorNames
- 806 • References
- 807 • ReferenceNames

808 **8.4 CIM_BindsToLANEndpoint**

809 Table 6 lists implementation requirements for operations. If implemented, these operations shall be
 810 implemented as defined in [DSP0200](#). In addition, and unless otherwise stated in Table 6, all operations in
 811 the default list in 8.3 shall be implemented as defined in [DSP0200](#).

812 NOTE Related profiles may define additional requirements on operations for the profile class.

813 **Table 6 – Operations: CIM_BindsToLANEndpoint**

Operation	Requirement	Messages
Associators	Unspecified	None
AssociatorNames	Unspecified	None
References	Unspecified	None
ReferenceNames	Unspecified	None

814 **8.5 CIM_ElementSettingData**

815 Table 7 lists implementation requirements for operations. If implemented, these operations shall be
 816 implemented as defined in [DSP0200](#). In addition, and unless otherwise stated in Table 7, all operations in
 817 the default list in 8.3 shall be implemented as defined in [DSP0200](#).

818 NOTE Related profiles may define additional requirements on operations for the profile class.

819 **Table 7 – Operations: CIM_ElementSettingData**

Operation	Requirement	Messages
ModifyInstance	Conditional. See 8.5.1.	None
Associators	Unspecified	None
AssociatorNames	Unspecified	None
References	Unspecified	None
ReferenceNames	Unspecified	None

820 **8.5.1 CIM_ElementSettingData — ModifyInstance**

821 The behavior of the ModifyInstance operation varies depending on the property of the association
 822 modified and the instances that are referenced by the association instance.

823 **8.5.1.1 CIM_ElementSettingData Referencing CIM_IPAssignmentSettingData**

824 When an instance of CIM_ElementSettingData associates an instance of CIM_IPAssignmentSettingData
 825 with an instance of CIM_IPProtocolEndpoint, the following rules shall govern the behavior of the
 826 ModifyInstance operation:

- 827 • The ModifyInstance operation shall not allow the IsDefault property to be modified.
- 828 • The ModifyInstance operation shall not allow the IsCurrent property to be modified.
- 829 • When the ModifyInstance operation is used to set the IsNext property to a value of 1 (Is Next),
 830 the ModifyInstance operation shall implement the following behavior:
 - 831 1) The ModifyInstance operation shall find all other instances of CIM_ElementSettingData
 832 that associate an instance of CIM_IPAssignmentSettingData with the instance of
 833 CIM_IPProtocolEndpoint referenced by the target instance of CIM_ElementSettingData
 834 where the IsNext property has a value of 1 (Is Next).
 - 835 2) For each instance of CIM_ElementSettingData found, the ModifyInstance operation shall
 836 modify the value of its IsNext property to have a value of 2 (Is Not Next).
- 837 • When the IsNext property has a value of 1 (Is Next), the ModifyInstance operation shall not be
 838 supported.
- 839 • When the ModifyInstance operation is used to set the IsNext property to a value of 3 (Is Next for
 840 Single Use), the ModifyInstance operation shall implement the following behavior:
 - 841 1) The ModifyInstance operation shall find all other instances of CIM_ElementSettingData
 842 that associate an instance of CIM_IPAssignmentSettingData with the instance of
 843 CIM_IPProtocolEndpoint referenced by the target instance of CIM_ElementSettingData
 844 where the IsNext property has a value of 3 (Is Next For Single Use).
 - 845 2) For each instance of CIM_ElementSettingData found, the ModifyInstance operation shall
 846 modify the value of its IsNext property to have a value of 2 (Is Not Next).

847 **8.5.1.2 CIM_ElementSettingData Referencing CIM_StaticIPAssignmentSettingData**

848 When an instance of CIM_ElementSettingData associates an instance of
 849 CIM_StaticIPAssignmentSettingData with an instance of CIM_IPProtocolEndpoint, the ModifyInstance
 850 operation shall not be supported.

851 **8.6 CIM_HostedAccessPoint**

852 Table 8 lists implementation requirements for operations. If implemented, these operations shall be
 853 implemented as defined in [DSP0200](#). In addition, and unless otherwise stated in Table 8, all operations in
 854 the default list in 8.3 shall be implemented as defined in [DSP0200](#).

855 NOTE Related profiles may define additional requirements on operations for the profile class.

856 **Table 8 – Operations: CIM_HostedAccessPoint**

Operation	Requirement	Messages
Associators	Unspecified	None
AssociatorNames	Unspecified	None
References	Unspecified	None
ReferenceNames	Unspecified	None

8.7 CIM_HostedService

Table 9 lists implementation requirements for operations. If implemented, these operations shall be implemented as defined in [DSP0200](#). In addition, and unless otherwise stated in Table 9, all operations in the default list in 8.3 shall be implemented as defined in [DSP0200](#).

NOTE Related profiles may define additional requirements on operations for the profile class.

Table 9 – Operations: CIM_HostedService

Operation	Requirement	Messages
Associators	Unspecified	None
AssociatorNames	Unspecified	None
References	Unspecified	None
ReferenceNames	Unspecified	None

8.8 CIM_IPAssignmentSettingData

All operations in the default list in 8.3 shall be implemented as defined in [DSP0200](#).

NOTE Related profiles may define additional requirements on operations for the profile class.

8.9 CIM_IPConfigurationService

All operations in the default list in 8.3 shall be implemented as defined in [DSP0200](#).

NOTE Related profiles may define additional requirements on operations for the profile class.

8.10 CIM_IPProtocolEndpoint

Table 10 lists implementation requirements for operations. If implemented, these operations shall be implemented as defined in [DSP0200](#). In addition, and unless otherwise stated in Table 10, all operations in the default list in 8.3 shall be implemented as defined in [DSP0200](#).

NOTE Related profiles may define additional requirements on operations for the profile class.

Table 10 – Operations: CIM_IPProtocolEndpoint

Operation	Requirement	Messages
ModifyInstance	Conditional. See 8.10.1.	None

8.10.1 CIM_IPProtocolEndpoint — ModifyInstance operation

This clause details the specific requirements for the ModifyInstance operation applied to an instance of CIM_IPProtocolEndpoint.

8.10.1.1 CIM_IPProtocolEndpoint.ElementName property

When an instance of CIM_EnabledLogicalElementCapabilities is associated with the CIM_IPProtocolEndpoint instance and the CIM_EnabledLogicalElementCapabilities.ElementNameEditSupported property has a value of TRUE, the implementation shall allow the ModifyInstance operation to change the value of the ElementName property of the CIM_IPProtocolEndpoint instance. The ModifyInstance operation shall enforce the length restriction specified in the MaxElementNameLen property of the instance of CIM_EnabledLogicalElementCapabilities.

886 When no instance of CIM_EnabledLogicalElementCapabilities is associated with the
 887 CIM_IPProtocolEndpoint instance, or the ElementNameEditSupported property of the
 888 CIM_EnabledLogicalElementCapabilities instance has a value of FALSE, the implementation shall not
 889 allow the ModifyInstance operation to change the value of the ElementName property of the
 890 CIM_IPProtocolEndpoint instance.

891 **8.11 CIM_OrderedComponent**

892 Table 11 lists implementation requirements for operations. If implemented, these operations shall be
 893 implemented as defined in [DSP0200](#). In addition, and unless otherwise stated in Table 11, all operations
 894 in the default list in 8.3 shall be implemented as defined in [DSP0200](#).

895 NOTE Related profiles may define additional requirements on operations for the profile class.

896 **Table 11 – Operations: CIM_OrderedComponent**

Operation	Requirement	Messages
ModifyInstance	Optional. See 8.11.1.	None
Associators	Unspecified	None
AssociatorNames	Unspecified	None
References	Unspecified	None
ReferenceNames	Unspecified	None

897 **8.11.1 CIM_OrderedComponent — ModifyInstance**

898 The ModifyInstance operation may be supported for CIM_OrderedComponent. When an instance of
 899 CIM_OrderedComponent references an instance of CIM_DNSSettingData or an instance of
 900 CIM_DNSGeneralSettingData, the AssignedSequence property may be modified. When an instance of
 901 CIM_OrderedComponent references an instance of CIM_StaticIPAssignmentSettingData or an instance of
 902 CIM_DHCPSettingData, the AssignedSequence property shall not be modified.

903 **8.12 CIM_RemoteAccessAvailableToElement**

904 Table 12 lists implementation requirements for operations. If implemented, these operations shall be
 905 implemented as defined in [DSP0200](#). In addition, and unless otherwise stated in Table 12, all operations
 906 in the default list in 8.3 shall be implemented as defined in [DSP0200](#).

907 NOTE Related profiles may define additional requirements on operations for the profile class.

908 **Table 12 – Operations: CIM_RemoteAccessAvailableToElement**

Operation	Requirement	Messages
Associators	Unspecified	None
AssociatorNames	Unspecified	None
References	Unspecified	None
ReferenceNames	Unspecified	None

909 **8.13 CIM_RemoteServiceAccessPoint**

910 All operations in the default list in 8.3 shall be implemented as defined in [DSP0200](#).

911 NOTE Related profiles may define additional requirements on operations for the profile class.

912 **8.14 CIM_ServiceAffectsElement**

913 Table 13 lists implementation requirements for operations. If implemented, these operations shall be
 914 implemented as defined in [DSP0200](#). In addition, and unless otherwise stated in Table 13, all operations
 915 in the default list in 8.3 shall be implemented as defined in [DSP0200](#).

916 NOTE Related profiles may define additional requirements on operations for the profile class.

917 **Table 13 – Operations: CIM_ServiceAffectsElement**

Operation	Requirement	Messages
Associators	Unspecified	None
AssociatorNames	Unspecified	None
References	Unspecified	None
ReferenceNames	Unspecified	None

918 **8.15 CIM_StaticIPAssignmentSettingData**

919 Table 14 lists implementation requirements for operations. If implemented, these operations shall be
 920 implemented as defined in [DSP0200](#). In addition, and unless otherwise stated in Table 14, all operations
 921 in the default list in 8.3 shall be implemented as defined in [DSP0200](#).

922 NOTE Related profiles may define additional requirements on operations for the profile class.

923 **Table 14 – Operations: CIM_StaticIPAssignmentSettingData**

Operation	Requirement	Messages
ModifyInstance	Optional	None

924 **8.16 CIM_SystemDevice**

925 Table 15 lists implementation requirements for operations. If implemented, these operations shall be
 926 implemented as defined in [DSP0200](#). In addition, and unless otherwise stated in Table 15, all operations
 927 in the default list in 8.3 shall be implemented as defined in [DSP0200](#).

928 NOTE Related profiles may define additional requirements on operations for the profile class.

929 **Table 15 – Operations: CIM_SystemDevice**


Operation	Requirement	Messages
Associators	Unspecified	None
AssociatorNames	Unspecified	None
References	Unspecified	None
ReferenceNames	Unspecified	None

930 **9 Use cases**

931 This clause contains object diagrams and use cases for the *IP Interface Profile*.

932 **9.1 Miscellaneous object diagrams**

933 The object diagram in Figure 2 shows one possible method for advertising profile conformance. The
 934 instances of CIM_RegisteredProfile are used to identify the version of the *IP Interface Profile* with which
 935 an instance of CIM_IPProtocolEndpoint and its associated instances are conformant. An instance of
 936 CIM_RegisteredProfile exists for each profile that is instrumented in the system. One instance of
 937 CIM_RegisteredProfile identifies the “DMTF Base Server Profile version 1.0.0”. The other instance
 938 identifies the “DMTF IP Interface Profile version 1.0.0”. The CIM_IPProtocolEndpoint instance is scoped
 939 to an instance of CIM_ComputerSystem. This instance of CIM_ComputerSystem is conformant with the
 940 DMTF *Base Server Profile* version 1.0.0 as indicated by the CIM_ElementConformsToProfile association
 941 to the CIM_RegisteredProfile instance.

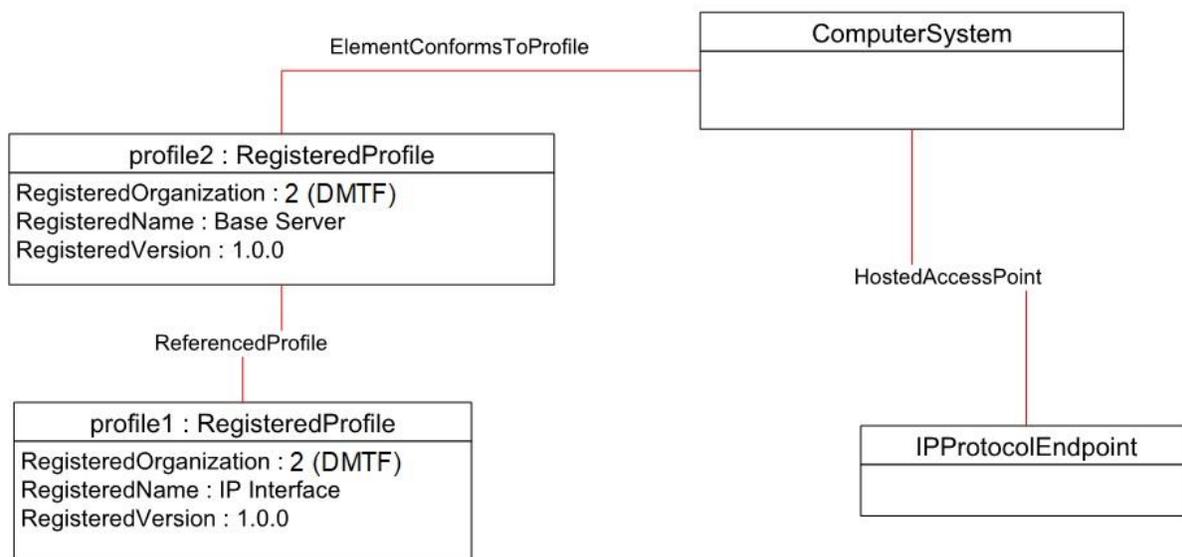


942

943 **Figure 2 – Registered Profile**

944 The object diagram shown in Figure 3 contains the basic elements used to model the current
 945 configuration of an IP interface when the CIM_IPProtocolEndpoint.ProtocolIFType is 4096 (Ipv4). The IP
 946 interface is bound to an Ethernet NIC, as illustrated by the CIM_BindsToLANEndpoint association
 947 between the CIM_IPProtocolEndpoint instance and the CIM_LANEndpoint instance. The AddressOrigin
 948 property of the CIM_IPProtocolEndpoint has a value of "static", indicating that the configuration was
 949 statically assigned. In this diagram, the *Ethernet Port Profile* and *IP Interface Profile* have been
 950 implemented.

951 The default gateway used by the IP interface is represented by the instance of
 952 CIM_RemoteServiceAccessPoint that is associated with the CIM_IPProtocolEndpoint instance through an
 953 instance of CIM_RemoteAccessAvailableToElement.

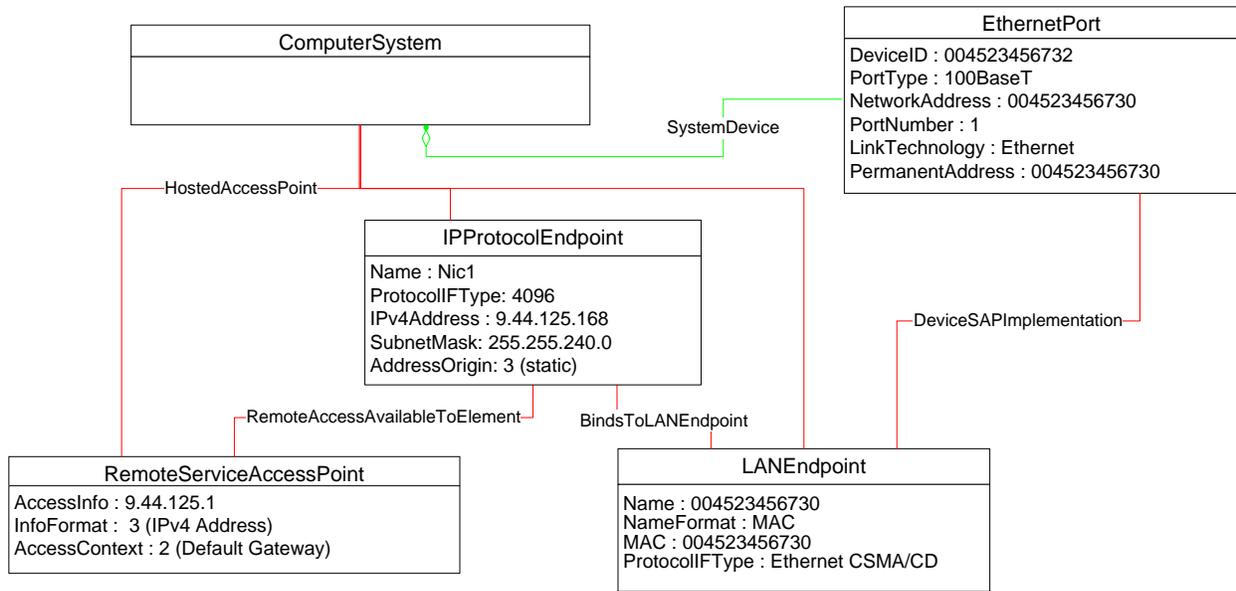

954


955

Figure 3 – Basic configuration — IPv4

956 **EXPERIMENTAL**

957 The object diagram shown in Figure 4 contains the basic elements used to model the current
 958 configuration of an IP interface when the CIM_IPProtocolEndpoint.ProtocolIFType is 4097 (IPv6). Note
 959 the similarities between this figure and the previous diagram. In this diagram, the *Ethernet Port Profile*
 960 and *IP Interface Profile* have been implemented.

961

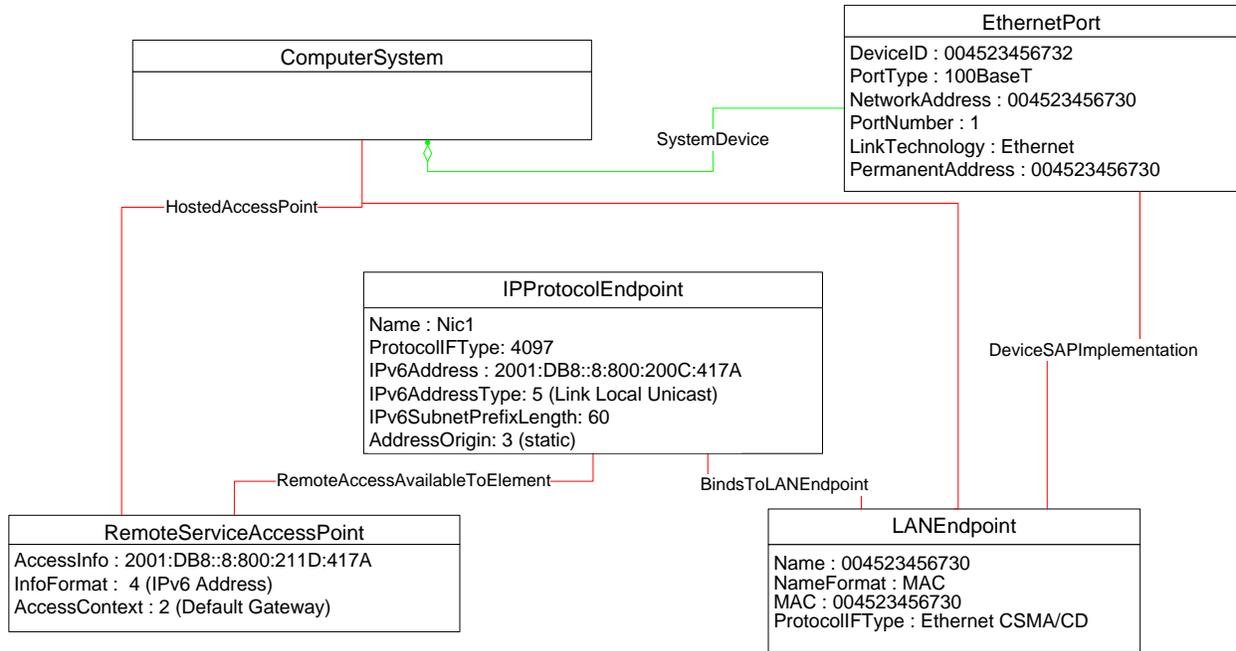

962

963

Figure 4 – Basic configuration — IPv6


964

The object diagram shown in Figure 5 contains the basic elements used to model the current configuration of two IP interfaces on a single EthernetPort — one that has an IPv4 address and one that has an IPv6 address. In this diagram, the *Ethernet Port Profile* and *IP Interface Profile* have been implemented.

965

966

967

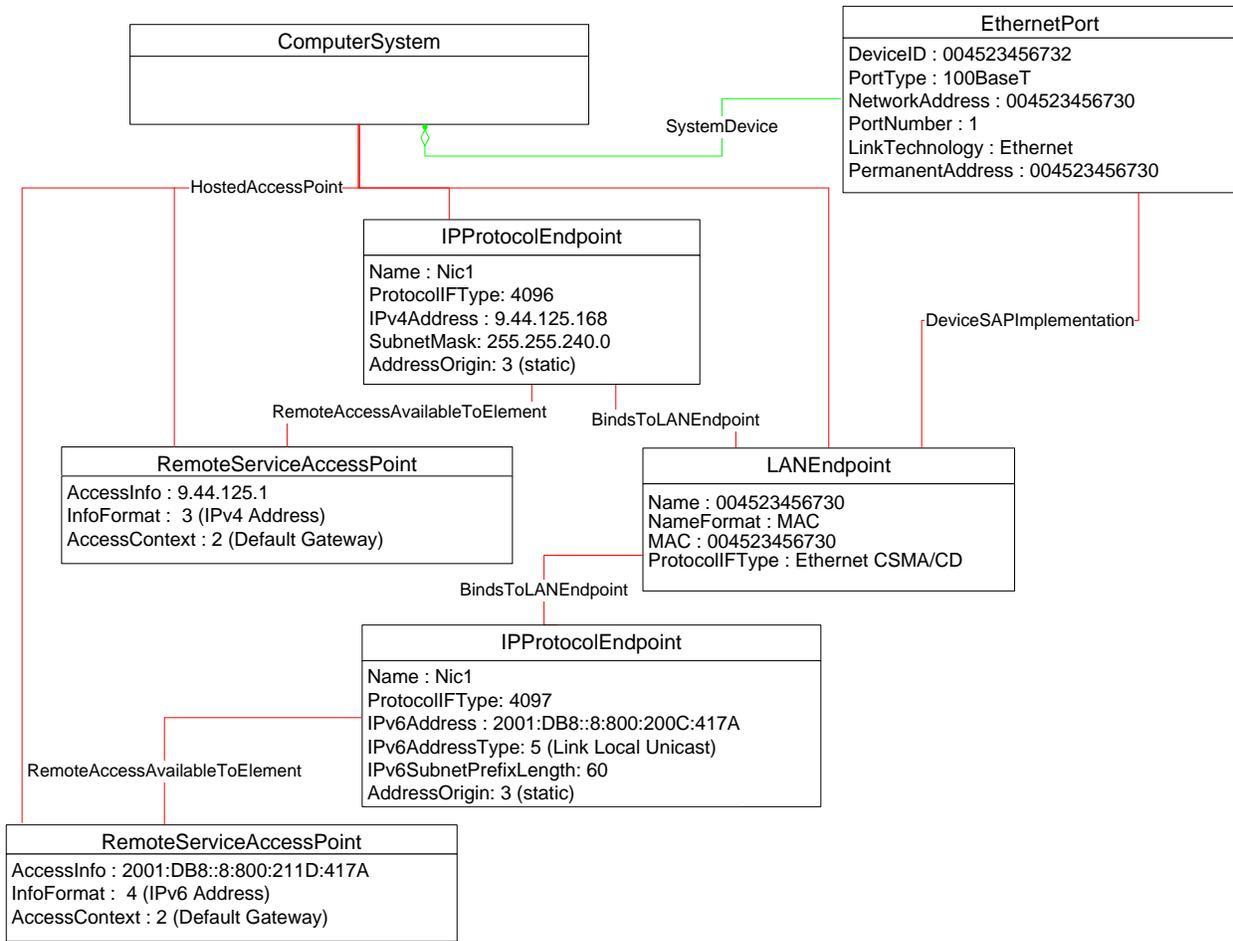


968

969

Figure 5 – Basic configuration — IPv4 and IPv6

970 **EXPERIMENTAL**

971 Figure 6 illustrates the elements and properties of an IP interface that supports static configuration. The
 972 IP interface currently has a single, alternate configuration associated with it. The optional IP configuration
 973 management behavior is depicted in this object diagram. Note that the pending configuration has been
 974 modified after it was applied to the CIM_IPProtocolEndpoint. Hence the values for properties of
 975 CIM_IPProtocolEndpoint do not align with the values of properties of the
 976 CIM_StaticIPAssignmentSettingData instance.

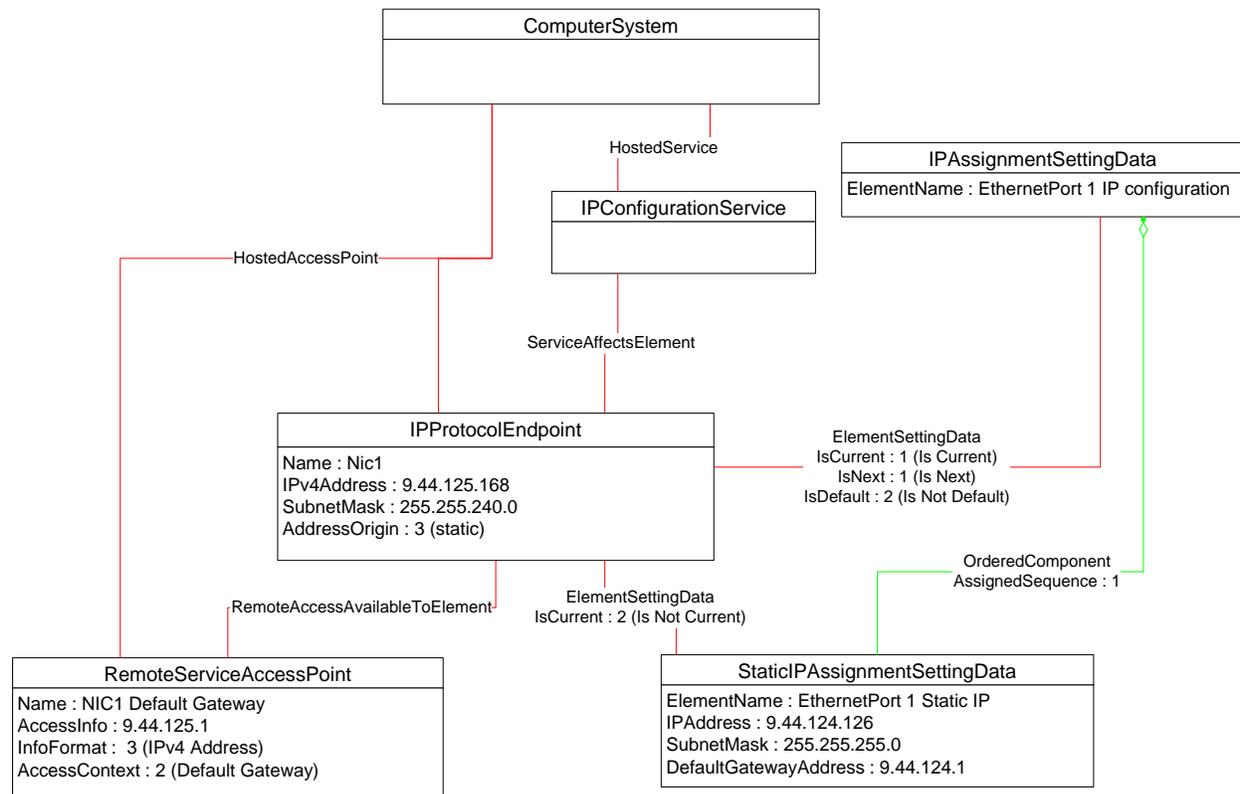

977


978

Figure 6 – Static current and pending configuration

979 The object diagram in Figure 7 illustrates an IP interface with two supported alternate configurations. Two
 980 discrete IP configuration options are available for the IP interface. Each option is represented by an
 981 instance of CIM_IPAssignmentSettingData. One configuration option represents the ability to statically
 982 assign the IP configuration. This option is indicated by the instance of CIM_OrderedComponent that
 983 associates the CIM_IPAssignmentSettingData instance with an instance of
 984 CIM_StaticIPAssignmentSettingData. The other configuration option is to obtain the configuration through
 985 a DHCP client. This option is indicated by the instance of CIM_OrderedComponent that associates the
 986 CIM_IPAssignmentSettingData with an instance of CIM_DHCPSettingData.

987 In this example, each configuration option consists of a single instance of a subclass of
 988 CIM_IPAssignmentSettingData. Therefore, the value of the AssignedSequence property of the
 989 CIM_OrderedComponent instances is irrelevant.

990 The default configuration is to attempt to obtain a configuration through DHCP. This default is indicated
 991 by the IsDefault property having a value of 1 (Is Default) on the CIM_ElementSettingData instance that
 992 associates the CIM_IPAssignmentSettingData instance with the CIM_IPProtocolEndpoint instance.
 993 However, the current configuration of the IP interface was statically assigned using the configuration
 994 identified by the CIM_IPAssignmentSettingData instance *static*. This configuration is indicated by the
 995 value of the IsCurrent property on the instance of CIM_ElementSettingData that associates the
 996 CIM_IPAssignmentSettingData instance *static* with the CIM_IPProtocolEndpoint instance, and by the
 997 value of the AddressOrigin property on the CIM_IPProtocolEndpoint instance. When the interface is
 998 restarted, the static configuration will be used again for the IP interface. This behavior is indicated by the
 999 value of the IsNext property on the instance of CIM_ElementSettingData that associates the
 1000 CIM_IPAssignmentSettingData instance *static* to the CIM_IPProtocolEndpoint instance.

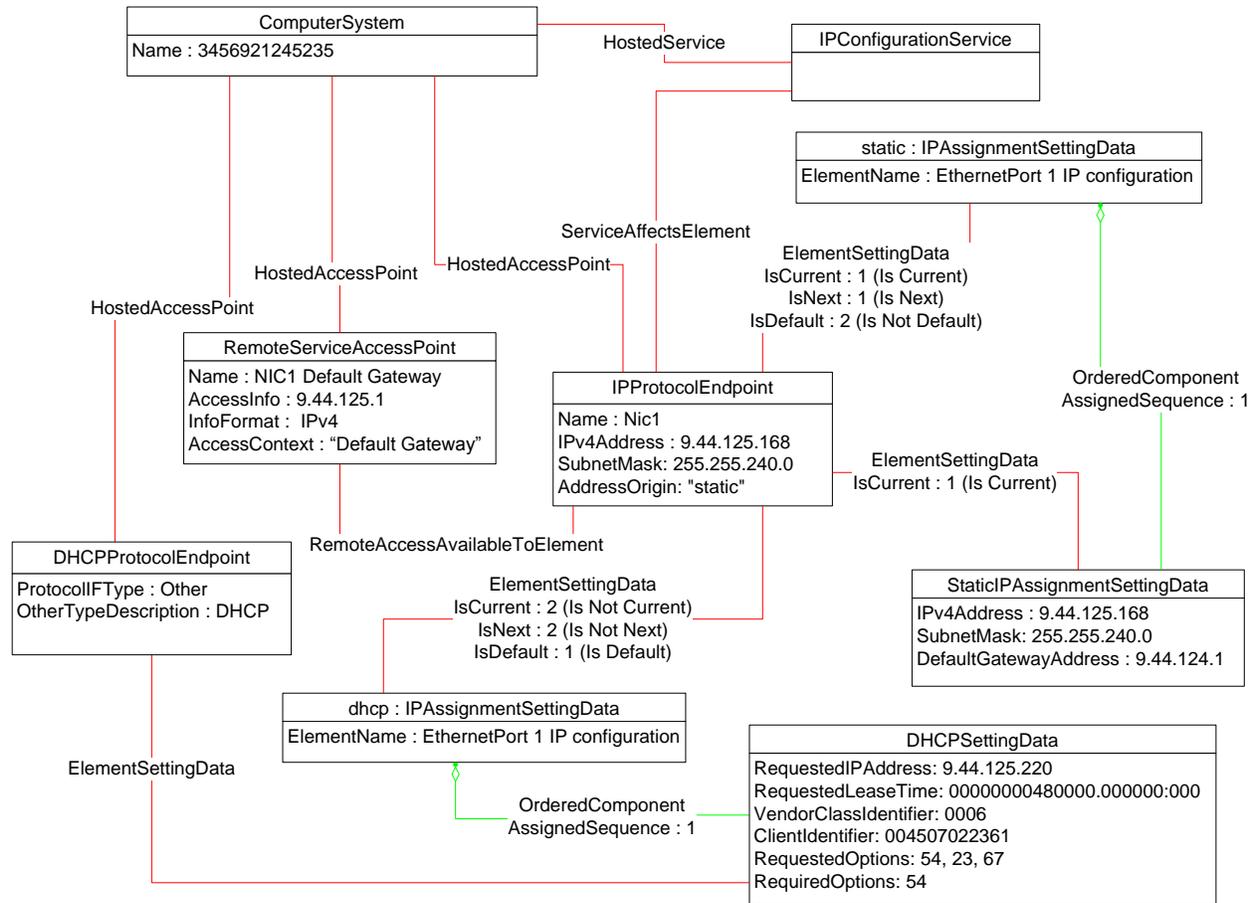

1001

1002

Figure 7 – Static and DHCP pending configurations


1003 The object diagram in Figure 8 provides an example of an IP interface that was configured to default to a
 1004 statically assigned IP configuration if the DHCP client failed to obtain a configuration from a DHCP server.

1005 The EnabledState and ClientState properties of the CIM_DHCPProtocolEndpoint instance indicate that
 1006 the DHCP client is not disabled but neither is it actively attempting to obtain a configuration any longer.

1007 No instance of CIM_RemoteServiceAccessPoint is associated with the CIM_DHCPProtocolEndpoint
 1008 instance because the DHCP client failed to communicate with a DHCP server.

1009 The AddressOrigin property of the CIM_IPProtocolEndpoint instance reflects that the address was
 1010 assigned statically.

1011

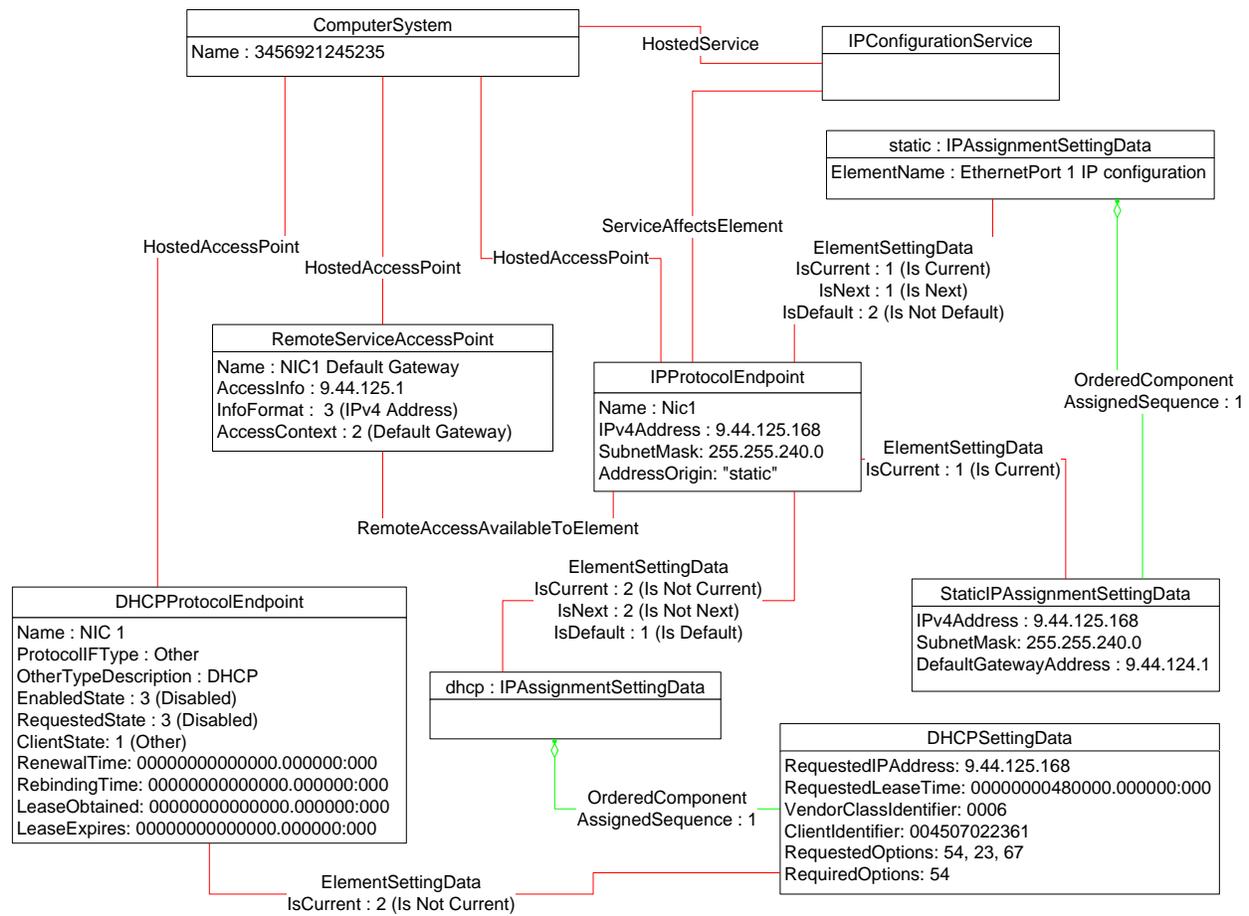


1012

1013

Figure 8 – DHCP timed out to a static configuration

1014 The object diagram in Figure 9 illustrates a configuration in which a system contains an integrated service
 1015 processor and they share the network interface of the system. The CIM_EthernetPort instance is
 1016 associated with the system1 instance, which indicates that the network device is owned by the server.
 1017 The MAC property of the lan1 instance matches the PermanentAddress property of the CIM_EthernetPort
 1018 instance, which indicates that the server is using the hardware MAC. The MAC property of the lan2
 1019 instance is different, which indicates that the service processor has been assigned a logical MAC. The
 1020 system and service processor each have a unique IP interface that has been statically configured.

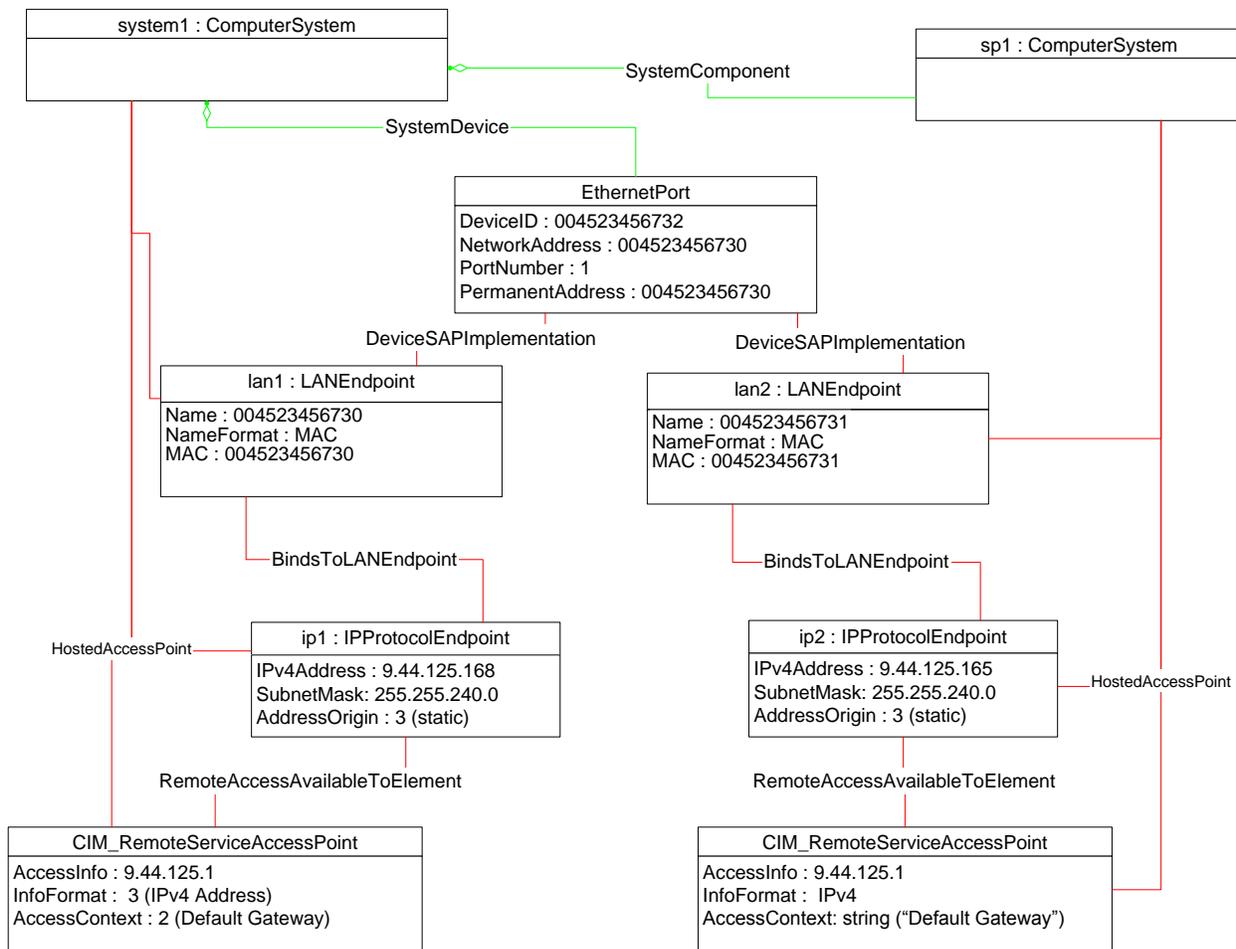

1021

1022

Figure 9 – Service processor and server share an NIC

1023

The object diagrams in Figure 10 through Figure 14 show different aspects of a single system. The system has support for the DNS and DHCP clients. For configurations using DHCP, the DNS configuration can be statically assigned or partially assigned through DHCP. The system itself does not support the persistence of alternate configurations. Rather the instrumentation layer presents the different configuration possibilities as distinct alternate configurations.

1028

Note that in the following figures extraneous classes that are not relevant to the point being illustrated are not shown. For example, the CIM_HostedAccessPoint associations are never included.

1029

1030

The object diagram in Figure 10 outlines the alternate configurations presented by the instrumentation layer for the system. Three alternate configurations are shown: static_only, dhcp_only, and dhcp_static.

1031

1032

The system persists a single underlying static IP configuration, which is represented by static1. When the configuration selected is static only or DHCP and then static, the same client static IP configuration is used.

1033

1034

1035

The system persists a single underlying DNS configuration represented by dns1 and dnsgen1.

1036


static_only represents a configuration that uses static assignment of the IP configuration, including support for static configuration of the DNS client. This behavior is indicated by the aggregated instances: static1, dns1, and dnsgen1.

1037

1038

1039 dhcp_only represents a configuration that uses DHCP to obtain the IP configuration. This behavior is
 1040 indicated by the aggregated instance dhcp1. The DNS configuration can be assigned through DHCP or
 1041 statically assigned. This behavior is indicated by the aggregated instances dns1 and dnsgen1. In the
 1042 event the DHCP client is unable to obtain a configuration, the system is implemented to default to a hard-
 1043 coded, well-known default static IP configuration. The existence of a default configuration is indicated by
 1044 the aggregated instance static3. Note that no advertisement mechanism is specified in the profile to
 1045 indicate that static3 represents hard-coded values that cannot be modified by the client. If the system
 1046 were implemented such that the DHCP client would be continually in use without a timeout to a static
 1047 configuration, the aggregated instance static3 would not exist.

1048 dhcp_static represents a configuration that attempts to use DHCP to obtain an IP configuration. In the
 1049 event the DHCP client fails to obtain a configuration, the system defaults to a client-assigned static IP
 1050 configuration. This behavior is indicated by the instances dhcp1 and static1 and the relative values of the
 1051 AssignedSequence property of the instances of CIM_OrderedComponent, which aggregate them into
 1052 dhcp_static.

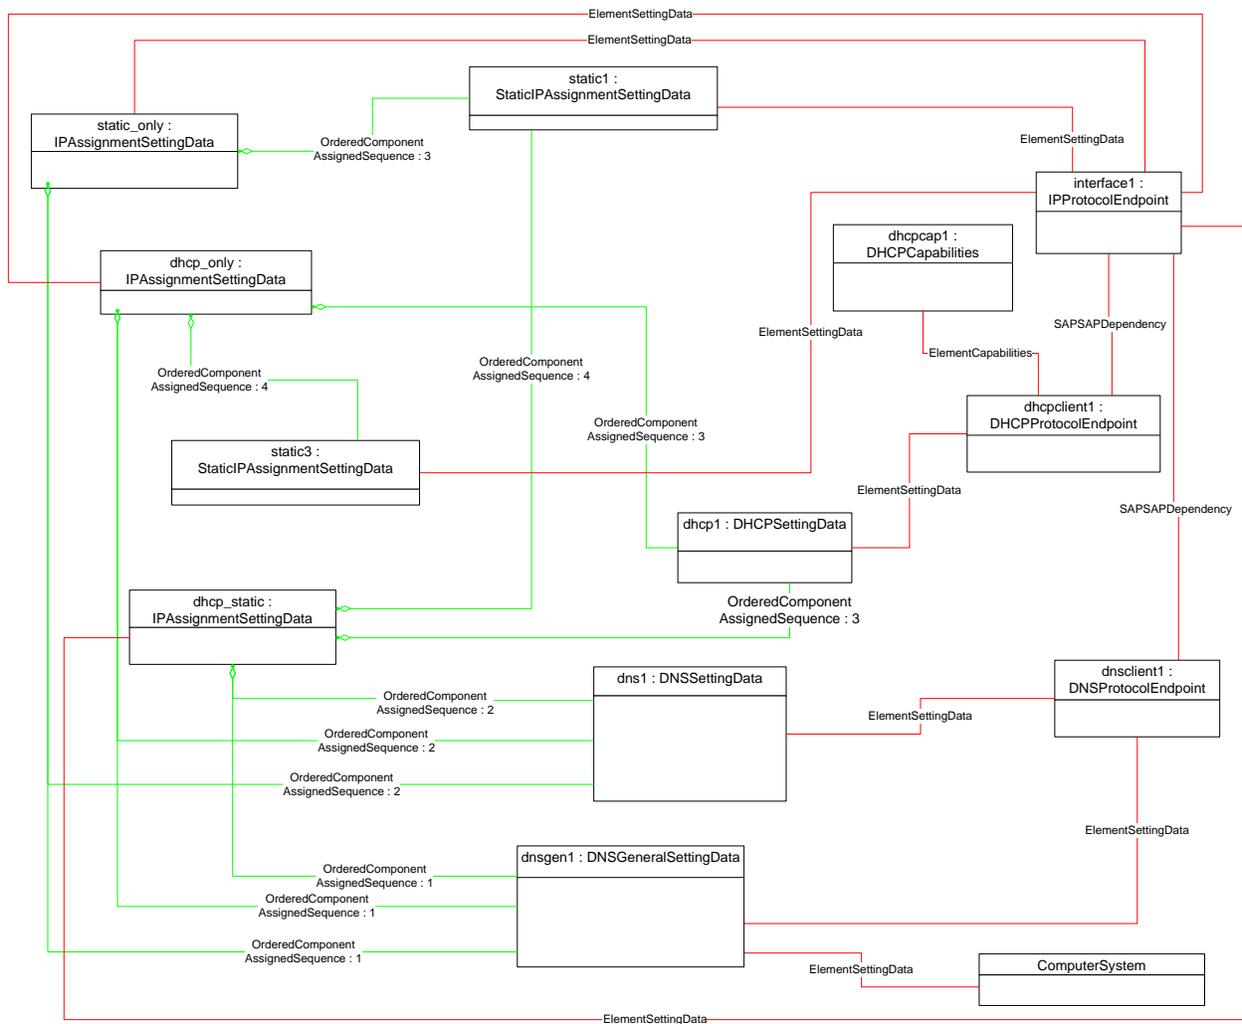


1053

1054

Figure 10 – Configuration choices

1055 The object diagram in Figure 11 reflects the system when the DHCP configuration method has been used
 1056 and the DNS configuration has partially been assigned through DHCP and partially statically configured.

1057 The use of the DHCP-only configuration is indicated by the IsCurrent property of the instance of
 1058 CIM_ElementSettingData that associates dhcp_only to interface1 having the value 1 (Is Current). The
 1059 DHCP configuration includes DHCP options that affect the DNS configuration. The DHCP options 8, 14,
 1060 and 17 are requested as indicated by the RequestedOptions property of dhcp1. Each of these options
 1061 was in turn received by the DHCP client, which is indicated by the value of the OptionsReceived property
 1062 of dhcpclient1. The DNS client has been configured to use the values received for options 14 and 17 as
 1063 indicated by the presence of these values in the DHCPOptionsToUse property of dnsclient1. The
 1064 properties on dnsclient1 reflect the current DNS client configuration. Note that the actual current
 1065 configuration does not directly reflect the configuration indicated by dns1 and dnsgen1. The two
 1066 properties for which values were supplied by the DHCP options instead reflect the values assigned by the
 1067 DHCP server.

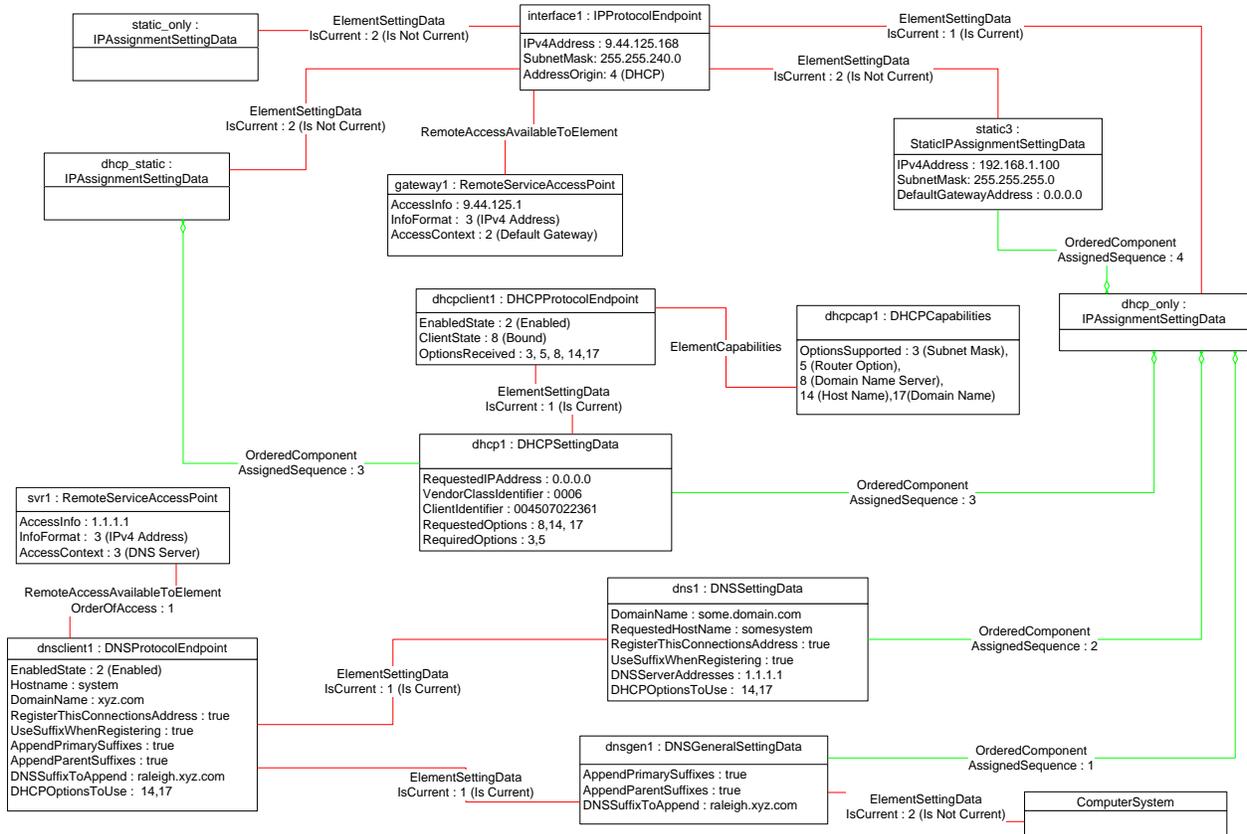

1068


1069

Figure 11 – DHCP assigned partial DNS

1070 The object diagram in Figure 12 reflects the system when the DHCP configuration method has been used
 1071 and the DNS configuration has been statically configured.

1072 The use of the DHCP-only configuration is indicated by the IsCurrent property of the instance of
 1073 CIM_ElementSettingData that associates dhcp_only to interface1 having the value 1 (Is Current).
 1074 Although the DHCP configuration includes DHCP options that affect the DNS configuration, the values
 1075 returned are not being used by the DNS client. This behavior is indicated by the absence of any values in

1076 the DHCPOptionsToUse property of dnsclient1. The actual current configuration directly reflects the
 1077 configuration indicated by dns1 and dnsngen1 because no DHCP options are selected for use.

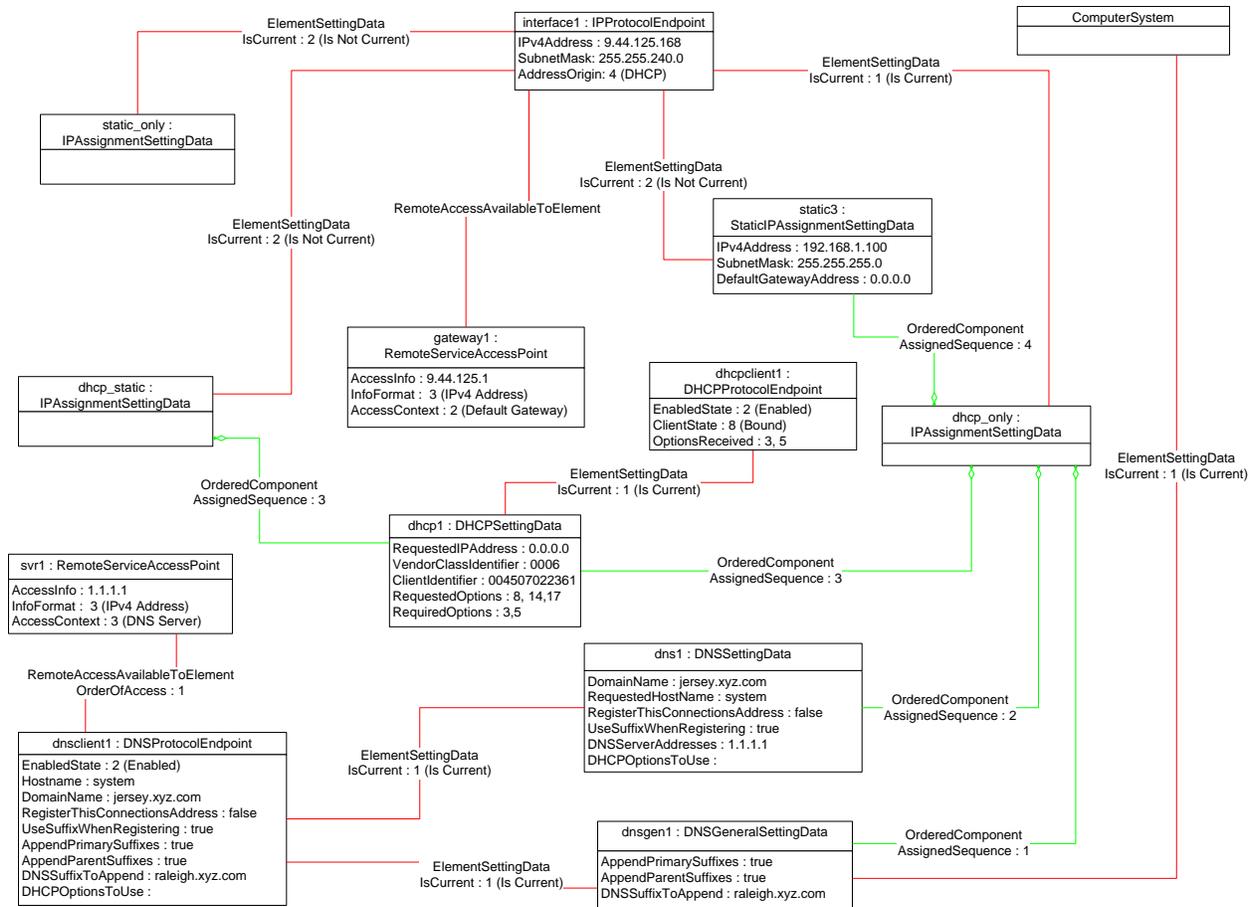

1078


1079

Figure 12 – DHCP with DNS statically configured

1080 **9.1.1 Sequence for disabled DNS client**

1081 The following three object diagrams illustrate the system when a client is configuring it to use a static IP
 1082 configuration with the DNS client disabled. The client first modifies the pending static configuration so that
 1083 the DNS settings will not be applied. Then it disables the DNS client directly. Finally, it applies the static
 1084 configuration.

1085 The object diagram in Figure 13 illustrates the state of the system before the client begins modifying it to
 1086 use a static IP configuration with DNS disabled. The last configuration applied was the DHCP-only
 1087 configuration, which is indicated by the value of the IsCurrent property of the CIM_ElementSettingData
 1088 instance that references dhcp_only and interface1. The static_only configuration has not yet been
 1089 modified by the client. As shown, the alternate DNS configuration represented by dns1 and dnsngen1
 1090 would be applied if static_only were applied to interface1.

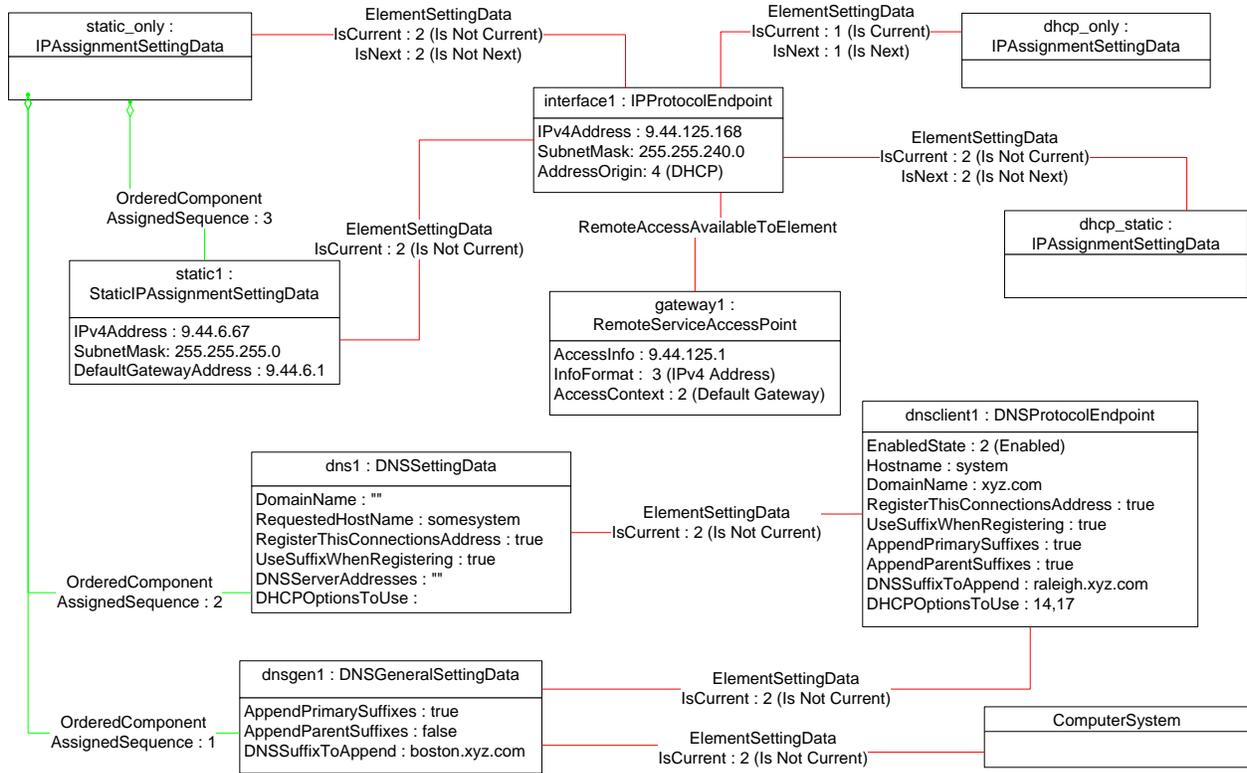


1091

1092

Figure 13 – Static without DNS configuration — One

1093 In Figure 14, static_only has been made the pending configuration for interface1. This behavior is
 1094 indicated by the value of the IsNext property of the instance of CIM_ElementSettingData that references
 1095 static_only and interface1. static_only has been modified such that the DNS configuration will not be
 1096 applied. This behavior is indicated by the AssignedSequence property having a value of 0 (zero) for each
 1097 of the CIM_OrderedComponent instances that reference static_only and dns1 or dnsgen1. Separately,
 1098 the DNS client has been disabled, which is indicated by the value of the EnabledState property of
 1099 dnsclient1.

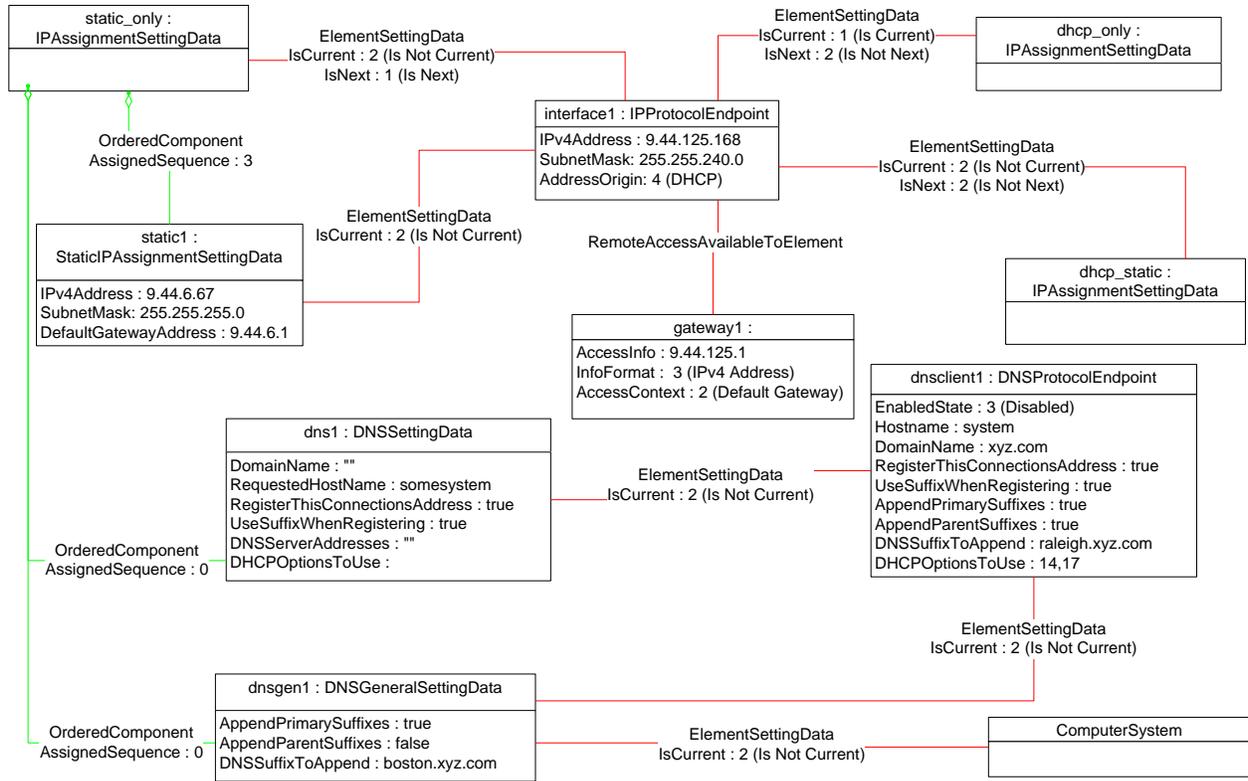

1100


1101

Figure 14 – Static without DNS configuration — Two

1102

Figure 15 shows the system after static_only has been applied to interface1. Note that the current DNS configuration has not changed as a result of applying static_only to interface1.

1103

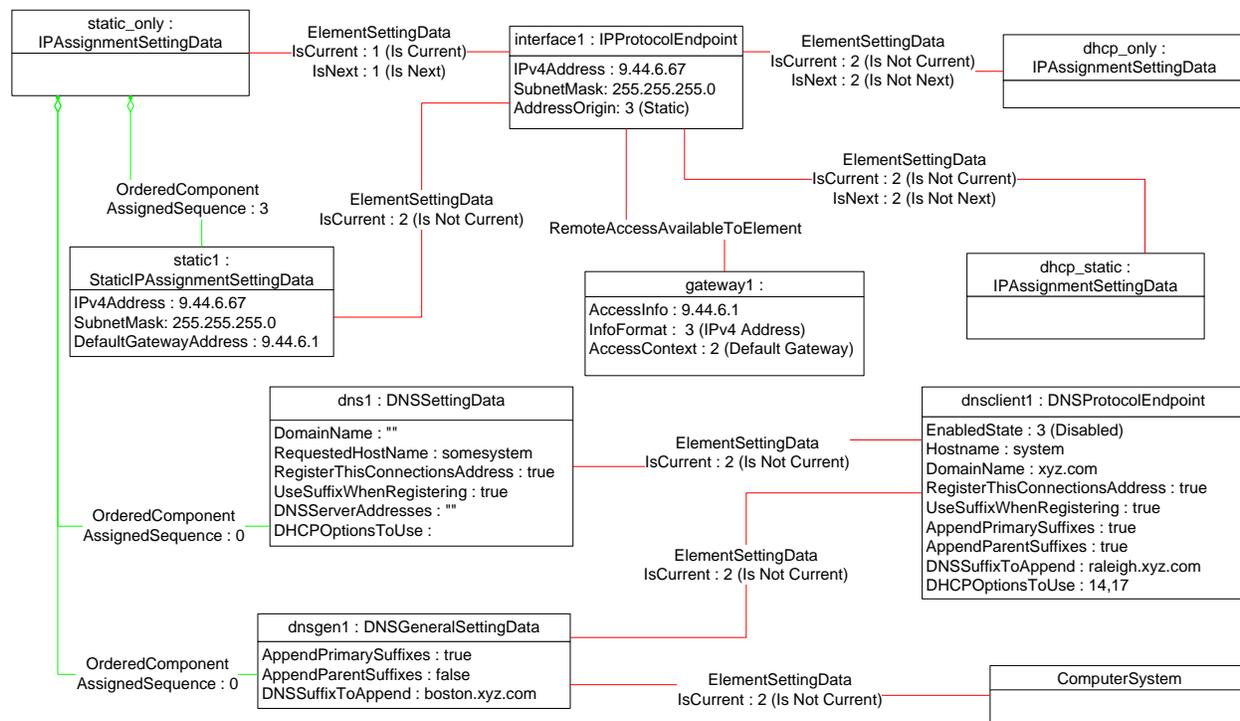

1104

1105

Figure 15 – Static without DNS configuration — Three

1106 9.2 Determine supported configuration methods

1107 A client can determine which configuration methods are supported for a given interface as follows:

- 1108 1) Find all instances of CIM_IPAssignmentSettingData that are associated with the
- 1109 CIM_IPProtocolEndpoint instance.
- 1110 2) For each instance of CIM_IPAssignmentSettingData:
 - 1111 a) Find all instances of subclasses of CIM_IPAssignmentSettingData that are associated with
 - 1112 the CIM_IPAssignmentSettingData instance through an instance of
 - 1113 CIM_OrderedComponent.
 - 1114 b) Query the value of the AddressOrigin property to determine the supported identified
 - 1115 configuration method.

1116 9.3 Determine gateway address

1117 A client can find the default gateway in use for an IP interface as follows:

- 1118 1) Find all instances of CIM_RemoteServiceAccessPoint that are associated with the
- 1119 CIM_IPProtocolEndpoint instance through an instance of
- 1120 CIM_RemoteAccessAvailableToElement.
- 1121 2) For each instance of CIM_RemoteServiceAccessPoint, determine if the value of the
- 1122 AccessContext property is "Default Gateway". If so, query the value of the AccessInfo property.

1123 9.4 Determine method used for current configuration

1124 A client can determine the method by which the IP configuration was assigned by querying the

1125 AddressOrigin property of the CIM_IPProtocolEndpoint instance.

1126 9.5 Determine whether DHCP then static is supported

1127 An implementation may support attempting to acquire its IP configuration through a DHCP client and
1128 defaulting to a static configuration if the client fails to acquire a configuration from a DHCP server. A client
1129 can determine whether this functionality is supported as follows:

- 1130 1) Find all instances of CIM_IPAssignmentSettingData (the parent class and not subclasses) that
1131 are associated with the CIM_IPProtocolEndpoint instance.
- 1132 2) For each instance of CIM_IPAssignmentSettingData:
 - 1133 a) Find all instances of CIM_DHCPSettingData that are associated through an instance of
1134 CIM_OrderedComponent.
 - 1135 b) Find all instances of CIM_StaticIPAssignmentSettingData that are associated through an
1136 instance of CIM_OrderedComponent.
- 1137 3) Determine if there is an instance of CIM_DHCPSettingData such that the value of the
1138 AssignedSequence property of the CIM_OrderedComponent that associates the instance of
1139 CIM_DHCPSettingData with the instance of CIM_IPAssignmentSettingData is less than the
1140 value of the AssignedSequence property of an instance of CIM_OrderedComponent that
1141 associates the CIM_StaticIPAssignmentSettingData with the instance of
1142 CIM_IPAssignmentSettingData. If so, DHCP then static is supported.

1143 9.6 View default configuration

1144 A client can view the default configuration for an IP interface as follows:

- 1145 1) Find all instances of CIM_ElementSettingData that associate an instance of
1146 CIM_IPAssignmentSettingData (the parent class and not subclasses) with the
1147 CIM_IPProtocolEndpoint instance.
- 1148 2) For each instance of CIM_ElementSettingData, see if the value of the IsDefault property is 1 (Is
1149 Default).

1150 9.7 Configure the interface to use DHCP

1151 An implementation may support attempting to acquire its IP configuration through a DHCP client. A client
1152 can determine whether this functionality is supported and configure the interface to use it as follows:

- 1153 1) Find all instances of CIM_IPAssignmentSettingData (the parent class and not subclasses) that
1154 are associated with the CIM_IPProtocolEndpoint instance.
- 1155 2) For each instance of CIM_IPAssignmentSettingData:
 - 1156 a) Find an instance of CIM_DHCPSettingData that is associated through an instance of
1157 CIM_OrderedComponent.
 - 1158 b) Verify that no instances of CIM_StaticIPAssignmentSettingData are associated with the
1159 instance of CIM_IPAssignmentSettingData.

1160 This instance of CIM_IPAssignmentSettingData represents a DHCP configuration.

- 1161 3) Find an instance of CIM_IPConfigurationService that is associated with the
1162 CIM_IPProtocolEndpoint instance through an instance of CIM_ServiceAffectsElement.
- 1163 4) Invoke the ApplySettingToIPProtocolEndpoint() method of the CIM_IPConfigurationService
1164 instance, specifying the instances of CIM_IPProtocolEndpoint and
1165 CIM_IPAssignmentSettingData.

1166 9.8 Establish a static IP configuration for an interface

1167 A client can manually assign an IP configuration to an interface as follows:

- 1168 1) Find all instances of CIM_IPAssignmentSettingData (the parent class and not subclasses) that
1169 are associated with the CIM_IPProtocolEndpoint instance.
- 1170 2) For each instance of CIM_IPAssignmentSettingData:
 - 1171 a) Find an instance of CIM_StaticIPAssignmentSettingData that is associated through an
1172 instance of CIM_OrderedComponent.
 - 1173 b) Verify that no other instances of CIM_StaticIPAssignmentSettingData or instances of
1174 CIM_DHCPSettingData are associated with the instance of CIM_IPAssignmentSettingData
1175 through an instance of CIM_OrderedComponent.
 - 1176 c) For the instance of CIM_ElementSettingData that associates the
1177 CIM_IPAssignmentSettingData instance with the instance of CIM_IPProtocolEndpoint,
1178 verify that the value of the IsDefault property is 2 (Is Not Default).

1179 This instance of CIM_IPAssignmentSettingData represents a modifiable, static configuration for
1180 the IP interface.
- 1181 3) Modify the properties of the CIM_StaticIPAssignmentSettingData instance to contain the
1182 appropriate configuration for the IP interface.
- 1183 4) Apply the pending configuration using the steps in 9.9 or 9.10.

1184 9.9 Apply a pending configuration — synchronously

1185 Some implementations may support modifying the configuration of an IP interface without requiring a
1186 restart of the underlying network interface. If this behavior is supported by the implementation, then given
1187 an instance of CIM_IPProtocolEndpoint for which the configuration should be modified and an instance of
1188 CIM_IPAssignmentSettingData that represents the new configuration, a client can:

- 1189 1) Find an instance of CIM_IPConfigurationService that is associated with the
1190 CIM_IPProtocolEndpoint instance through an instance of CIM_ServiceAffectsElement.
- 1191 2) Invoke the ApplySettingToIPProtocolEndpoint() method of the CIM_IPConfigurationService,
1192 specifying the instances of CIM_IPProtocolEndpoint and CIM_IPAssignmentSettingData.

1193 9.10 Apply a pending configuration — upon restart

1194 Some implementations may require that the IP interface be restarted in order for a new configuration that
1195 is bound to the interface to take effect. If an implementation requires that the IP interface be restarted,
1196 then given an instance of CIM_IPProtocolEndpoint for which the configuration should be modified and an
1197 instance of CIM_IPAssignmentSettingData that represents the new configuration, a client can:

- 1198 1) Find an instance of CIM_ElementSettingData that associates the CIM_IPAssignmentSettingData
1199 instance with the CIM_IPProtocolEndpoint instance.
- 1200 2) Set the IsNext property of the CIM_ElementSettingData instance to a value of 1 (Is Next).
- 1201 3) Invoke the RequestStateChange() method of the CIM_IPProtocolEndpoint instance, with a
1202 RequestedState of 11 (Reset).

1203 **9.11 Determine whether DNS configuration was DHCP assigned**

1204 Starting at the CIM_DNSProtocolEndpoint instance, a client can determine if any elements of the DNS
 1205 configuration were assigned through DHCP as follows:

- 1206 1) Find the instance of CIM_IPProtocolEndpoint that is associated through an instance of
 1207 CIM_SAPSAPDependency.
- 1208 2) Find the instance of CIM_DHCPProtocolEndpoint that is associated with the
 1209 CIM_IPProtocolEndpoint instance through an instance of CIM_SAPSAPDependency.
- 1210 3) Query the EnabledState property of the CIM_DHCPProtocolEndpoint instance for the value 2
 1211 (Enabled) to ensure that the DHCP client was used.
- 1212 4) Query the OptionsReceived property of the CIM_DHCPProtocolEndpoint instance to determine
 1213 if one of the DNS-related options (8, 14, or 17) was received.

1214 **9.12 Determine whether ElementName can be modified**

1215 A client can determine whether it can modify the ElementName property of an instance of
 1216 CIM_IPProtocolEndpoint as follows:

- 1217 1) Find the CIM_EnabledLogicalElementCapabilities instance that is associated with the
 1218 CIM_IPProtocolEndpoint instance.
- 1219 2) Query the value of the ElementNameEditSupported property of the
 1220 CIM_EnabledLogicalElementCapabilities instance. If the value is TRUE, the client can modify
 1221 the ElementName property of the target instance.

1222 **9.13 Determine whether state management is supported**

1223 A client can determine whether state management is supported for an instance of
 1224 CIM_IPProtocolEndpoint as follows:

- 1225 1) Find the CIM_EnabledLogicalElementCapabilities instance that is associated with the
 1226 CIM_IPProtocolEndpoint instance.
- 1227 2) Query the value of the RequestedStatesSupported property. If at least one value is specified,
 1228 state management is supported.

1229 **10 CIM Elements**

1230 Table 16 shows the instances of CIM Elements for this profile. Instances of the CIM Elements shall be
 1231 implemented as described in Table 16. Clauses 7 (“Implementation”) and 8 (“Methods”) may impose
 1232 additional requirements on these elements.

1233 **Table 16 – CIM Elements: IP Interface Profile**

Element Name	Requirement	Description
Classes		
CIM_BindsToLANEndpoint	Optional	See 7.6 and 10.1.
CIM_ElementCapabilities	Conditional	See 7.1.2 and 10.2.
CIM_EnabledLogicalElementCapabilities	Optional	See 7.1.2 and 10.5.
CIM_ElementSettingData (IPAssignmentSettingData)	Conditional	See 7.4.2, and 10.43.
CIM_ElementSettingData (StaticIPAssignmentData)	Conditional	See 7.4.4, and 10.4.

Element Name	Requirement	Description
CIM_HostedAccessPoint (IPProtocolEndpoint)	Mandatory	See 10.7.
CIM_HostedAccessPoint (RemoteServiceAccessPoint)	Conditional	See 10.6.
CIM_HostedService	Conditional	See 7.4.1 and 10.8.
CIM_IPAssignmentSettingData	Conditional	See 7.4 and 10.9.
CIM_IPConfigurationService	Optional	See 7.4 and 10.10.
CIM_IPProtocolEndpoint	Mandatory	See 10.11.
CIM_OrderedComponent	Conditional	See 10.12.
CIM_RegisteredProfile	Mandatory	See 10.13.
CIM_RemoteAccessAvailableToElement	Conditional	See 10.14.
CIM_RemoteServiceAccessPoint	Optional	See 10.15.
CIM_ServiceAffectsElement	Conditional	See 7.4 and 10.16.
CIM_StaticIPAssignmentSettingData	Conditional	See 10.17.
Indications		
None defined in this profile		

1234 **10.1 CIM_BindsToLANEndpoint**

1235 CIM_BindsToLANEndpoint relates the CIM_IPProtocolEndpoint instance with the CIM_LANEndpoint
 1236 instance on which it depends. Table 17 provides information about the properties of
 1237 CIM_BindsToLANEndpoint.

1238 **Table 17 – Class: CIM_BindsToLANEndpoint**

Elements	Requirement	Description
Antecedent	Mandatory	Key: This shall be a reference to an instance of CIM_LANEndpoint. Cardinality 0..1
Dependent	Mandatory	Key: This shall be a reference to the Central Instance. Cardinality 1

1239 **10.2 CIM_ElementCapabilities**

1240 CIM_ElementCapabilities associates an instance of CIM_EnabledLogicalElementCapabilities with the
 1241 CIM_IPProtocolEndpoint instance. Table 18 provides information about the properties of
 1242 CIM_ElementCapabilities.

1243 **Table 18 – Class: CIM_ElementCapabilities**

Elements	Requirement	Description
ManagedElement	Mandatory	Key: This shall be a reference to the Central Instance. Cardinality 1..*

Elements	Requirement	Description
Capabilities	Mandatory	Key: This shall be a reference to the instance of CIM_EnabledLogicalElementCapabilities. Cardinality 0..1

1244 **10.3 CIM_ElementSettingData — CIM_IPAssignmentSettingData reference**

1245 CIM_ElementSettingData associates instances of CIM_IPAssignmentSettingData with the
 1246 CIM_IPProtocolEndpoint instance. Table 19 provides information about the properties of
 1247 CIM_ElementSettingData.

1248 **Table 19 – Class: CIM_ElementSettingData — CIM_IPAssignmentSettingData**

Elements	Requirement	Description
ManagedElement	Mandatory	Key: This shall be a reference to the Central Instance. Cardinality 1..*
SettingData	Mandatory	Key: This shall be a reference to an instance of CIM_IPAssignmentSettingData. Cardinality *
IsDefault	Mandatory	Matches 1 (Is Default) or 2 (Is Not Default)
IsCurrent	Mandatory	Matches 1 (Is Current) or 2 (Is Not Current)
IsNext	Mandatory	Matches 1 (Is Next), 2 (Is Not Next), or 3 (Is Next For Single Use)

1249 **10.4 CIM_ElementSettingData — CIM_StaticIPAssignmentSettingData reference**

1250 CIM_ElementSettingData associates instances of CIM_StaticIPAssignmentSettingData with the
 1251 CIM_IPProtocolEndpoint instance. Table 20 provides information about the properties of
 1252 CIM_ElementSettingData.

1253 **Table 20 – Class: CIM_ElementSettingData — CIM_StaticIPAssignmentSettingData**

Elements	Requirement	Description
ManagedElement	Mandatory	Key: This shall be a reference to the Central Instance. Cardinality 1..*
SettingData	Mandatory	Key: This shall be a reference to an instance of CIM_StaticIPAssignmentSettingData. Cardinality *
IsCurrent	Mandatory	Matches 1 (Is Current) or 2 (Is Not Current)

1254 **10.5 CIM_EnabledLogicalElementCapabilities**

1255 CIM_EnabledLogicalElementCapabilities indicates support for managing the IP interface. Table 21
 1256 provides information about the properties of CIM_EnabledLogicalElementCapabilities.

1257 **Table 21 – Class: CIM_EnabledLogicalElementCapabilities**

Elements	Requirement	Description
InstanceID	Mandatory	Key
RequestedStatesSupported	Mandatory	See 7.1.2.1.1 and 7.1.3.1.1.
ElementNameEditSupported	Mandatory	See 7.1.4.1.1 and 7.1.5.1.1.
MaxElementNameLen	Conditional	See 7.1.4.1.2 and 7.1.5.1.2.

1258 **10.6 CIM_HostedAccessPoint — CIM_RemoteServiceAccessPoint reference**

1259 An instance of CIM_HostedAccessPoint Association between an instance of CIM_ProtocolEndpoint and
 1260 CIM_RemoteServiceAccessPoint shall only be instantiated if CIM_RemoteServiceAccessPoint is
 1261 supported.

1262 CIM_HostedAccessPoint relates the CIM_RemoteServiceAccessPoint instance that represents the
 1263 default gateway with its scoping CIM_ComputerSystem instance. Table 22 provides information about the
 1264 properties of CIM_HostedAccessPoint.

1265 **Table 22 – Class: CIM_HostedAccessPoint — CIM_RemoteServiceAccessPoint**

Elements	Requirement	Description
Antecedent	Mandatory	Key: This shall be a reference to the Scoping Instance. Cardinality 1
Dependent	Mandatory	Key: This shall be a reference to an instance of CIM_RemoteServiceAccessPoint. Cardinality *

1266 **10.7 CIM_HostedAccessPoint — CIM_IPProtocolEndpoint reference**

1267 CIM_HostedAccessPoint relates the Central Instance with its Scoping Instance. Table 23 provides
 1268 information about the properties of CIM_HostedAccessPoint.

1269 **Table 23 – Class: CIM_HostedAccessPoint — CIM_IPProtocolEndpoint**

Elements	Requirement	Description
Antecedent	Mandatory	Key: This shall be a reference to the Central Instance. Cardinality 1
Dependent	Mandatory	Key: This shall be a reference to an instance of CIM_RemoteServiceAccessPoint. Cardinality 1..*

1270 **10.8 CIM_HostedService**

1271 CIM_HostedService relates the CIM_IPConfigurationService instance to its scoping
 1272 CIM_ComputerSystem instance. Table 24 provides information about the properties of
 1273 CIM_HostedService.

1274 **Table 24 – Class: CIM_HostedService**

Elements	Requirement	Description
Antecedent	Mandatory	Key: This shall be a reference to the Central Instance. Cardinality 1
Dependent	Mandatory	Key: This shall be a reference to an instance of CIM_IPConfigurationService. Cardinality *

1275 **10.9 CIM_IPAssignmentSettingData**

1276 CIM_IPAssignmentSettingData is the aggregation point for the SettingData instances that define a
 1277 configuration that can be applied to an IP interface. Table 25 provides information about the properties of
 1278 CIM_IPAssignmentSettingData.

1279 **Table 25 – Class: CIM_IPAssignmentSettingData**

Elements	Requirement	Description
InstanceID	Mandatory	Key
AddressOrigin	Mandatory	Matches 2 (Not Applicable)
ElementName	Mandatory	Pattern ".*"

1280 **10.10 CIM_IPConfigurationService**

1281 CIM_IPConfigurationService represents the ability to configure an IP interface. Table 26 provides
 1282 information about the properties of CIM_IPConfigurationService.

1283 **Table 26 – Class: CIM_IPConfigurationService**

Elements	Requirement	Description
SystemCreationClassName	Mandatory	Key
CreationClassName	Mandatory	Key
SystemName	Mandatory	Key
Name	Mandatory	Key
ElementName	Mandatory	Pattern ".*"
ApplySettingToIPProtocolEndpoint()	Optional	See 8.1.1.1.

1284 **10.11 CIM_IPProtocolEndpoint**

1285 CIM_IPProtocolEndpoint represents an IP interface that is associated with an Ethernet interface. Table 27
 1286 provides information about the properties of CIM_IPProtocolEndpoint.

1287 **Table 27 – Class: CIM_IPProtocolEndpoint**

Elements	Requirement	Description
SystemCreationClassName	Mandatory	Key
CreationClassName	Mandatory	Key
SystemName	Mandatory	Key
Name	Mandatory	Key
NameFormat	Mandatory	Pattern ".*"
ProtocolIFType	Mandatory	See 7.1.1.2.
RequestedState	Mandatory	See 7.1.2.2 and 7.1.3.2.
EnabledState	Mandatory	See 7.1.2.3 and 7.1.3.3.
ElementName	Mandatory	Pattern ".*"
RequestStateChange()	Conditional	See 8.1.
IPv4Address	Conditional	See 7.1.1.2.
SubnetMask	Conditional	See 7.1.1.2 and 7.1.1.4.
AddressOrigin	Mandatory	See 7.1.1.1.
IPv6Address	Conditional	See 7.1.1.2 and 7.1.1.5 – EXPERIMENTAL
IPv6AddressType	Conditional	See 7.1.1.2 – EXPERIMENTAL
IPv6SubnetPrefixLength	Conditional	See 7.1.1.2 – EXPERIMENTAL

1288 **10.12 CIM_OrderedComponent**

1289 CIM_OrderedComponent associates an instance of CIM_IPAssignmentSettingData to the instances of
 1290 CIM_StaticIPAssignmentSettingData, CIM_DHCPSettingData, CIM_DNSSettingData, and
 1291 CIM_DNSGeneralSettingData that compose a configuration. Table 28 provides information about the
 1292 properties of CIM_OrderedComponent.

1293 **Table 28 – Class: CIM_OrderedComponent**

Elements	Requirement	Description
GroupComponent	Mandatory	Key: See 7.4.3.1.
PartComponent	Mandatory	Key: See 7.4.3.2.
AssignedSequence	Mandatory	See 7.4.3.3.

1294 **10.13 CIM_RegisteredProfile**

1295 CIM_RegisteredProfile identifies the *IP Interface Profile* in order for a client to determine whether an
 1296 instance of CIM_IPProtocolEndpoint is conformant with this profile. The CIM_RegisteredProfile class is
 1297 defined by the [Profile Registration Profile](#). With the exception of the mandatory values specified for the
 1298 properties in Table 29, the behavior of the CIM_RegisteredProfile instance is in accordance with the
 1299 [Profile Registration Profile](#).

1300 **Table 29 – Class: CIM_RegisteredProfile**

Elements	Requirement	Description
RegisteredName	Mandatory	This property shall have a value of "IP Interface".
RegisteredVersion	Mandatory	This property shall have a value of "1.0.3".
RegisteredOrganization	Mandatory	This property shall have a value of 2 (DMTF).

1301 NOTE Previous versions of this document included the suffix "Profile" for the RegisteredName value. If
 1302 implementations querying for the RegisteredName value find the suffix "Profile", they should ignore the
 1303 suffix, with any surrounding white spaces, before any comparison is done with the value as specified in this
 1304 document.

1305 **10.14 CIM_RemoteAccessAvailableToElement**

1306 CIM_RemoteAccessAvailableToElement associates the CIM_IPProtocolEndpoint instance with the
 1307 CIM_RemoteServiceAccessPoint instance that represents the network gateway. Table 30 provides
 1308 information about the properties of CIM_RemoteAccessAvailableToElement.

1309 **Table 30 – Class: CIM_RemoteAccessAvailableToElement**

Elements	Requirement	Description
Antecedent	Mandatory	Key: See 7.1.6.2.
Dependent	Mandatory	Key: See 7.1.6.3.
OrderOfAccess	Mandatory	See 7.1.6.4.

1310 **10.15 CIM_RemoteServiceAccessPoint**

1311 CIM_RemoteServiceAccessPoint represents the managed system's view of the default gateway. Table
 1312 31 provides information about the properties of CIM_RemoteServiceAccessPoint.

1313 **Table 31 – Class: CIM_RemoteServiceAccessPoint**

Elements	Requirement	Description
SystemCreationClassName	Mandatory	Key
CreationClassName	Mandatory	Key
SystemName	Mandatory	Key
Name	Mandatory	Key
AccessContext	Mandatory	Matches 2 (Default Gateway)
AccessInfo	Mandatory	See 7.1.6.1.
InfoFormat	Mandatory	Matches 3 (IPv4 Address)
ElementName	Mandatory	Pattern ".*"

1314 **10.16 CIM_ServiceAffectsElement**

1315 CIM_ServiceAffectsElement associates an instance of CIM_IPConfigurationService with an instance of
 1316 CIM_IPProtocolEndpoint that the service is able to configure. Table 32 provides information about the
 1317 properties of CIM_ServiceAffectsElement.

1318 **Table 32 – Class: CIM_ServiceAffectsElement**

Elements	Requirement	Description
AffectingElement	Mandatory	Key: This shall be a reference to the instance of CIM_IPConfigurationService. Cardinality *
AffectedElement	Mandatory	Key: This shall be a reference to the Central Instance. Cardinality 1..*
ElementAffects	Mandatory	Matches 5 (Manages)

1319 **10.17 CIM_StaticIPAssignmentSettingData**

1320 CIM_StaticIPAssignmentSettingData represents a static configuration that can be applied to an instance
 1321 of CIM_IPProtocolEndpoint. Table 33 provides information about the properties of
 1322 CIM_StaticIPAssignmentSettingData.

1323 **Table 33 – Class: CIM_StaticIPAssignmentSettingData**

Elements	Requirement	Description
InstanceID	Mandatory	Key
AddressOrigin	Mandatory	Matches 3 (Static)
ElementName	Mandatory	Pattern ".*"
IPv4Address	Mandatory	
SubnetMask	Mandatory	
GatewayIPv4Address	Conditional	See 7.5.3.1.
IPv6Address	Optional	EXPERIMENTAL
IPv6AddressType	Optional	EXPERIMENTAL
IPv6SubnetPrefixLength	Optional	EXPERIMENTAL
GatewayIPv6Address	Optional	EXPERIMENTAL

1324

**ANNEX A
(informative)**

Change log

1325
1326
1327
1328

Version	Date	Description
1.0.0	2008-07-27	Final Standard & addition of IPv6 support as Experimental
1.0.1	2009-09-24	Errata 1.0.1
1.0.2	2010-08-02	Version 1.0.2 of the Final Standard formatted for DMTF Standard release
1.0.3	2018-12-18	<p>This errata addresses these issues:</p> <ul style="list-style-type: none"> • Updated RegisteredVersion to reflect errata version number in clause 10.2 • Updated RegisteredOrganization description to reflect correct value for DMTF in clause 10.2. • Updated CIM_Elements table in clause 10 with additional instances and relevant clarification in clause 7 <p>Updated use cases to reflect the above fixes.</p>

1329
1330